


# Tracking

- Establish where an object is, other aspects of state, using time sequence
  - Biggest problem -- Data Association
- Key ideas
  - Tracking by detection
  - Tracking through flow

# Track by detection (simple form)

- Assume
  - a fairly reliable detector (e.g. faces; back of heads)
  - detections that are well spaced in images (or have distinctive properties)
    - e.g. news anchors; heads in public
- Track by
  - detect in each frame
  - link using matching algorithm
    - measurements with no track? create new track
    - tracks with no measurement? wait, then reap

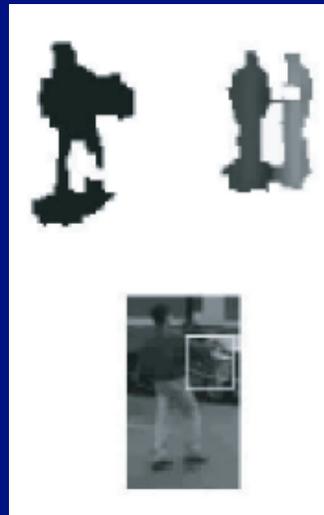

# Track by flow (simple form)

- Assume
  - appearance unknown (but domain, parametric flow model known)
  - optic flow assumptions, as before
- Initialize
  - mark out domain
- Track
  - choose flow model parameters that align domain in pic  $n$  with  $n+1$  best
  - push domain through flow model




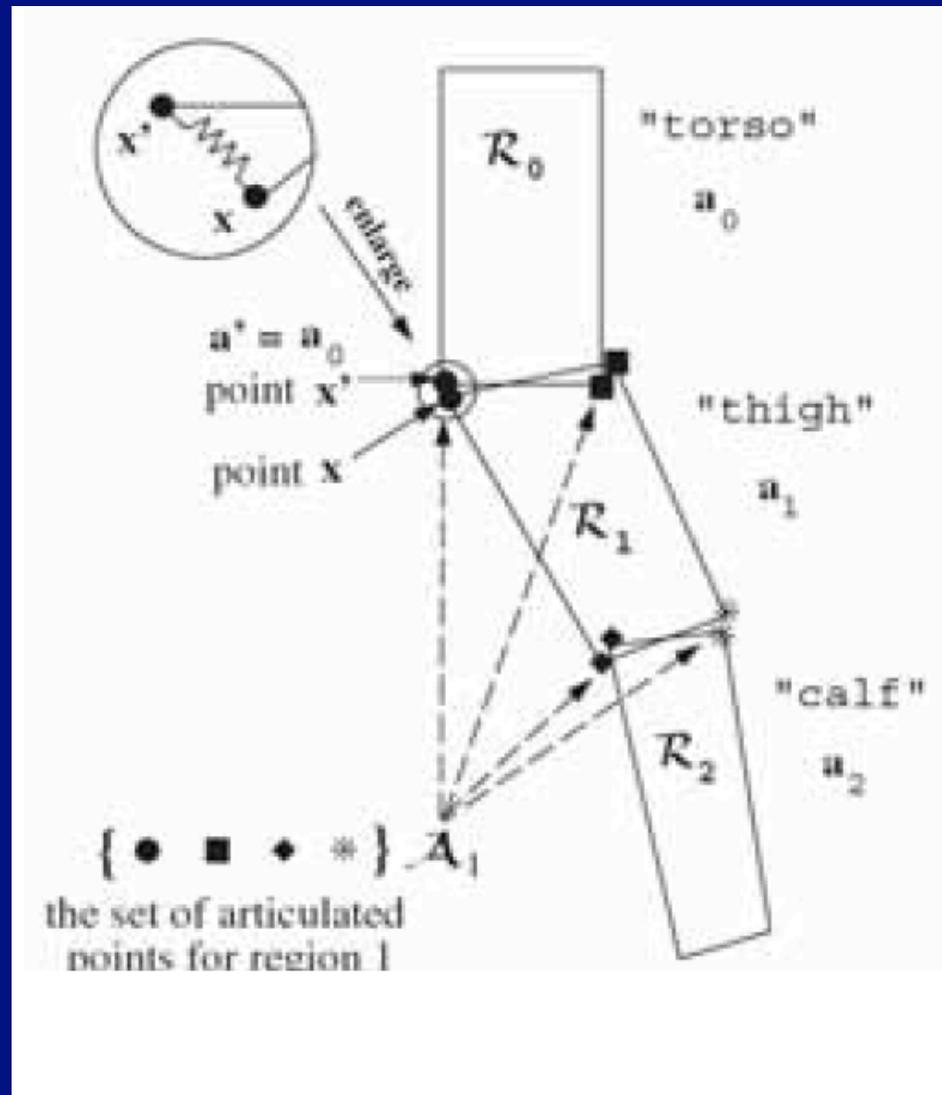


Figure from Ju, Black and Yacoob, "Cardboard people"



Figure from Ju, Black and Yacoob, "Cardboard people"

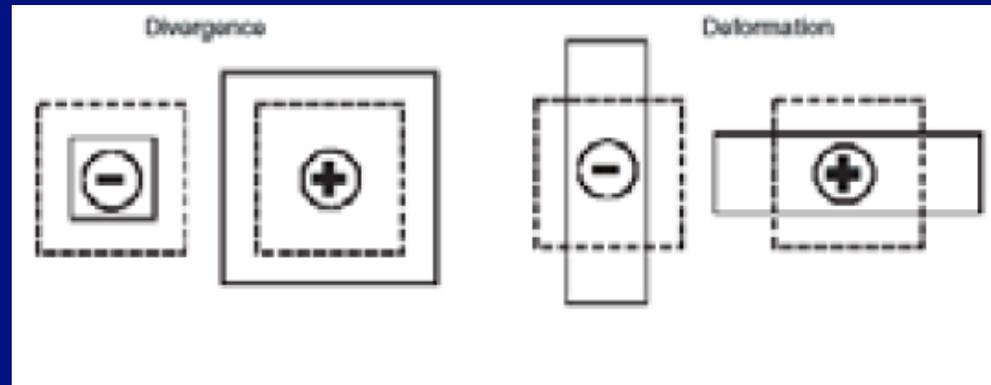


$$\mathbf{a} = (0, 1, 0, 0, 0, 1, 0, 0)$$

$$\mathbf{a} = (0, 1, 0, 0, 0, -1, 0, 0).$$

$$(u(\mathbf{x}), v(\mathbf{x}))^T =$$

$$(a_0 + a_1x + a_2y + a_6x^2 + a_7xy, a_3 + a_4x + a_5y + a_6xy + a_7y^2)$$

Figure from Ju, Black and Yacoob, "Cardboard people"

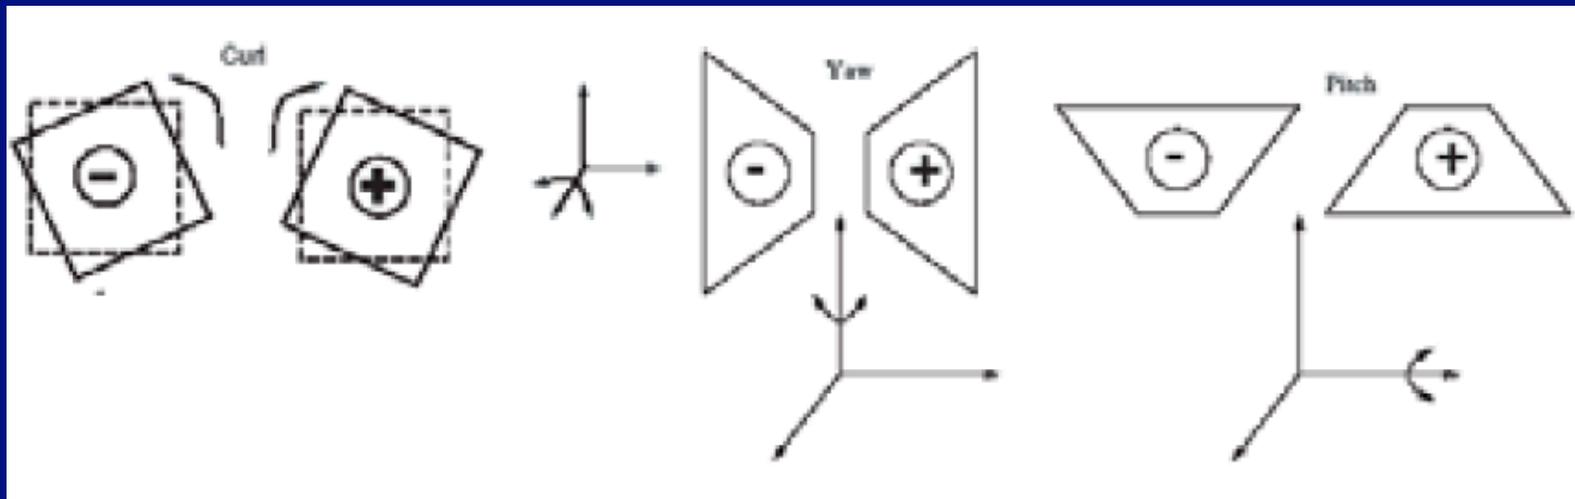

$(0, 0, -1, 0, 1, 0, 0, 0)$

$(0, 0, 0, 0, 0, 1, 0)$

$(0, 0, 0, 0, 0, 0, 1)$

Figure from Ju, Black and Yacoob, "Cardboard people"

# Dangers

- Loss of track
  - small errors accumulate in model of appearance
  - DRIFT
- Appearance often isn't constant



# Tracking - more formal view

- Very general model:
  - We assume there are moving objects, which have an underlying state  $X$
  - There are observations  $Y$ , some of which are functions of this state
  - There is a clock
    - at each tick, the state changes
    - at each tick, we get a new observation
- Examples
  - object is ball, state is 3D position+velocity, observations are stereo pairs
  - object is person, state is body configuration, observations are frames, clock is in camera (30 fps)

# Tracking - Probabilistic formulation

- Given
  - $P(X_{i-1}|Y_0, \dots, Y_{i-1})$ 
    - “Prior”
- We should like to know
  - $P(X_i|Y_0, \dots, Y_{i-1})$ 
    - “Predictive distribution”
  - $P(X_i|Y_0, \dots, Y_i)$ 
    - “Posterior”

## The three main issues in tracking

- **Prediction:** we have seen  $\mathbf{y}_0, \dots, \mathbf{y}_{i-1}$  — what state does this set of measurements predict for the  $i$ 'th frame? to solve this problem, we need to obtain a representation of  $P(\mathbf{X}_i | \mathbf{Y}_0 = \mathbf{y}_0, \dots, \mathbf{Y}_{i-1} = \mathbf{y}_{i-1})$ .
- **Data association:** Some of the measurements obtained from the  $i$ -th frame may tell us about the object's state. Typically, we use  $P(\mathbf{X}_i | \mathbf{Y}_0 = \mathbf{y}_0, \dots, \mathbf{Y}_{i-1} = \mathbf{y}_{i-1})$  to identify these measurements.
- **Correction:** now that we have  $\mathbf{y}_i$  — the relevant measurements — we need to compute a representation of  $P(\mathbf{X}_i | \mathbf{Y}_0 = \mathbf{y}_0, \dots, \mathbf{Y}_i = \mathbf{y}_i)$ .

## Key assumptions:

- **Only the immediate past matters:** formally, we require

$$P(\mathbf{X}_i | \mathbf{X}_1, \dots, \mathbf{X}_{i-1}) = P(\mathbf{X}_i | \mathbf{X}_{i-1})$$

This assumption hugely simplifies the design of algorithms, as we shall see; furthermore, it isn't terribly restrictive if we're clever about interpreting  $\mathbf{X}_i$  as we shall show in the next section.

- **Measurements depend only on the current state:** we assume that  $\mathbf{Y}_i$  is conditionally independent of all other measurements given  $\mathbf{X}_i$ . This means that

$$P(\mathbf{Y}_i, \mathbf{Y}_j, \dots, \mathbf{Y}_k | \mathbf{X}_i) = P(\mathbf{Y}_i | \mathbf{X}_i) P(\mathbf{Y}_j, \dots, \mathbf{Y}_k | \mathbf{X}_i)$$

Again, this isn't a particularly restrictive or controversial assumption, but it yields important simplifications.

## Tracking as Induction - base case

Firstly, we assume that we have  $P(\mathbf{X}_0)$

$$\begin{aligned} P(\mathbf{X}_0 | \mathbf{Y}_0 = \mathbf{y}_0) &= \frac{P(\mathbf{y}_0 | \mathbf{X}_0) P(\mathbf{X}_0)}{P(\mathbf{y}_0)} \\ &= \frac{P(\mathbf{y}_0 | \mathbf{X}_0) P(\mathbf{X}_0)}{\int P(\mathbf{y}_0 | \mathbf{X}_0) P(\mathbf{X}_0) d\mathbf{X}_0} \\ &\propto P(\mathbf{y}_0 | \mathbf{X}_0) P(\mathbf{X}_0) \end{aligned}$$

## Tracking as induction - induction step

Given

$$P(\mathbf{X}_{i-1}|\mathbf{y}_0, \dots, \mathbf{y}_{i-1}).$$

### **Prediction**

Prediction involves representing

$$P(\mathbf{X}_i|\mathbf{y}_0, \dots, \mathbf{y}_{i-1})$$

Our independence assumptions make it possible to write

$$\begin{aligned} P(\mathbf{X}_i|\mathbf{y}_0, \dots, \mathbf{y}_{i-1}) &= \int P(\mathbf{X}_i, \mathbf{X}_{i-1}|\mathbf{y}_0, \dots, \mathbf{y}_{i-1})d\mathbf{X}_{i-1} \\ &= \int P(\mathbf{X}_i|\mathbf{X}_{i-1}, \mathbf{y}_0, \dots, \mathbf{y}_{i-1})P(\mathbf{X}_{i-1}|\mathbf{y}_0, \dots, \mathbf{y}_{i-1})d\mathbf{X}_{i-1} \\ &= \int P(\mathbf{X}_i|\mathbf{X}_{i-1})P(\mathbf{X}_{i-1}|\mathbf{y}_0, \dots, \mathbf{y}_{i-1})d\mathbf{X}_{i-1} \end{aligned}$$

## Tracking as induction - induction step

### Correction

Correction involves obtaining a representation of

$$P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_i)$$

Our independence assumptions make it possible to write

$$\begin{aligned} P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_i) &= \frac{P(\mathbf{X}_i, \mathbf{y}_0, \dots, \mathbf{y}_i)}{P(\mathbf{y}_0, \dots, \mathbf{y}_i)} \\ &= \frac{P(\mathbf{y}_i | \mathbf{X}_i, \mathbf{y}_0, \dots, \mathbf{y}_{i-1}) P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_{i-1}) P(\mathbf{y}_0, \dots, \mathbf{y}_{i-1})}{P(\mathbf{y}_0, \dots, \mathbf{y}_i)} \\ &= P(\mathbf{y}_i | \mathbf{X}_i) P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_{i-1}) \frac{P(\mathbf{y}_0, \dots, \mathbf{y}_{i-1})}{P(\mathbf{y}_0, \dots, \mathbf{y}_i)} \\ &= \frac{P(\mathbf{y}_i | \mathbf{X}_i) P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_{i-1})}{\int P(\mathbf{y}_i | \mathbf{X}_i) P(\mathbf{X}_i | \mathbf{y}_0, \dots, \mathbf{y}_{i-1}) d\mathbf{X}_i} \end{aligned}$$




## Linear Dynamic Models



$$\mathbf{x}_i \sim N(\mathcal{D}_i \mathbf{x}_{i-1}; \Sigma_{d_i})$$

$$y_i \sim N(\mathcal{M}_i \mathbf{x}_i; \Sigma_{m_i})$$

# Examples

- Drifting points
  - Observability
- Points moving with constant velocity
- Points moving with constant acceleration
- Periodic motion
- Etc.

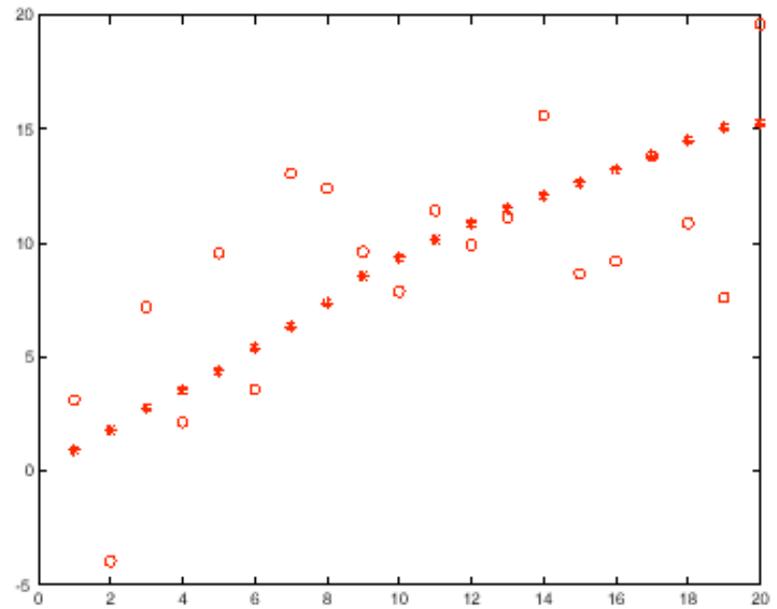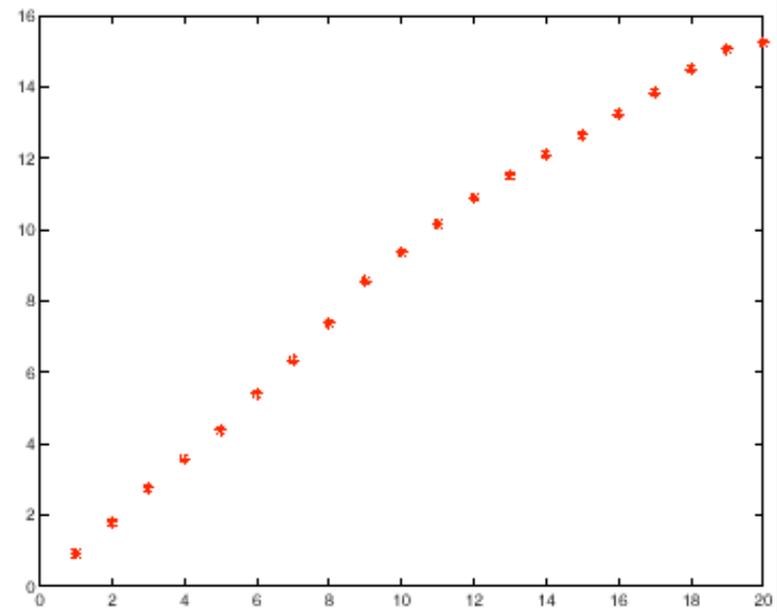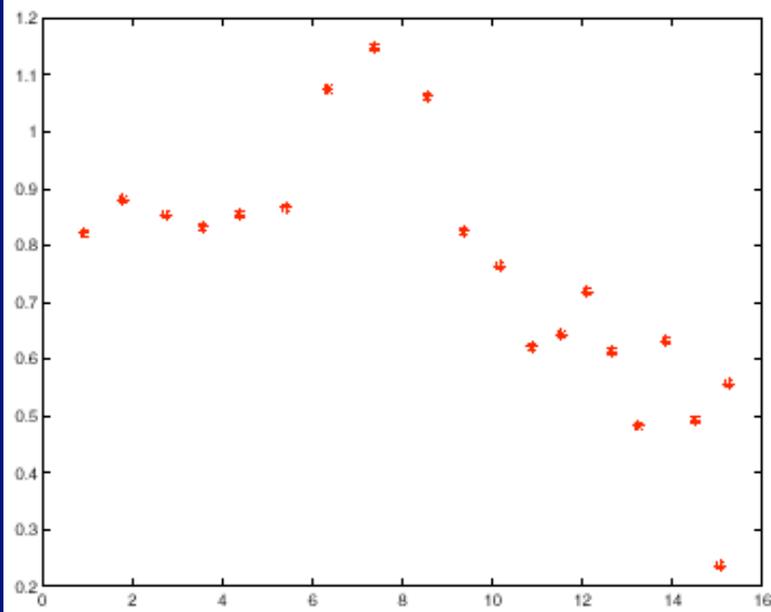

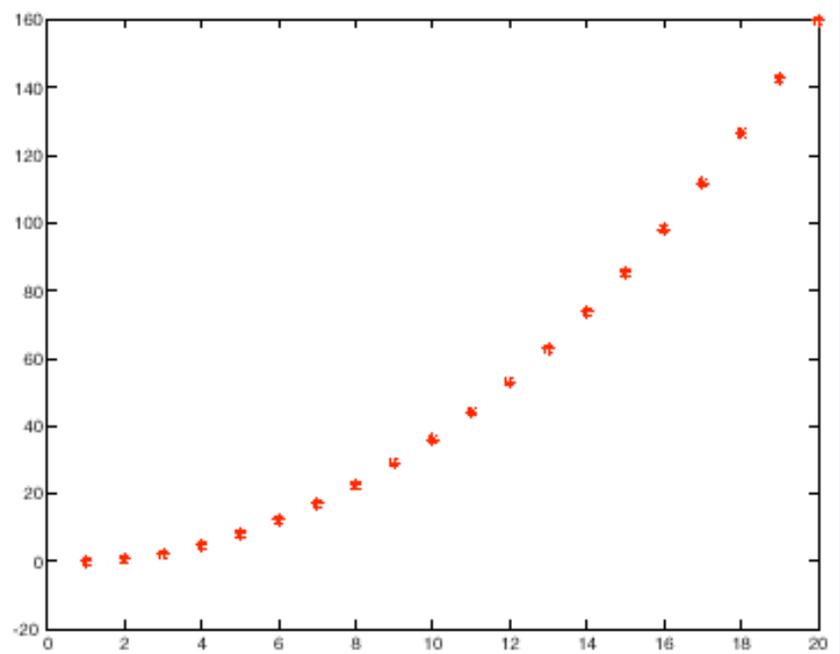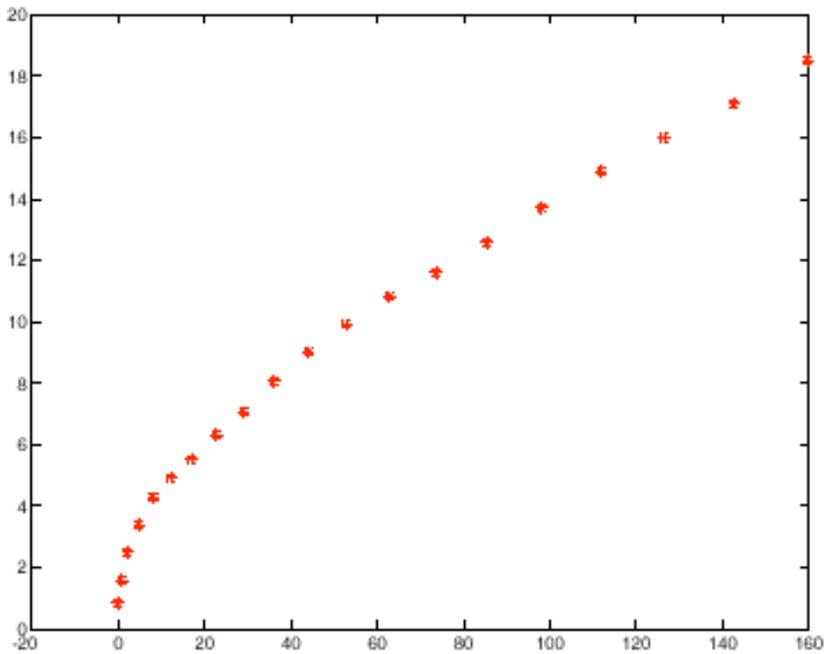

# The Kalman Filter

- Key ideas:
  - Linear models interact uniquely well with Gaussian noise - make the prior Gaussian, everything else Gaussian and the calculations are easy
  - Gaussians are really easy to represent --- once you know the mean and covariance, you're done

# The Kalman Filter in 1D

- Dynamic Model

$$x_i \sim N(d_i x_{i-1}, \sigma_{d_i}^2)$$

$$y_i \sim N(m_i x_i, \sigma_{m_i}^2)$$

- Notation

mean of  $P(X_i | y_0, \dots, y_{i-1})$  as  $\bar{X}_i^-$

mean of  $P(X_i | y_0, \dots, y_i)$  as  $\bar{X}_i^+$

the standard deviation of  $P(X_i | y_0, \dots, y_{i-1})$  as  $\sigma_i^-$

of  $P(X_i | y_0, \dots, y_i)$  as  $\sigma_i^+$

Dynamic Model:

$$x_i \sim N(d_i x_{i-1}, \sigma_{d_i})$$

$$y_i \sim N(m_i x_i, \sigma_{m_i})$$

Start Assumptions:  $\bar{x}_0^-$  and  $\sigma_0^-$  are known

Update Equations: Prediction

$$\bar{x}_i^- = d_i \bar{x}_{i-1}^+$$

$$\sigma_i^- = \sqrt{\sigma_{d_i}^2 + (d_i \sigma_{i-1}^+)^2}$$

Update Equations: Correction

$$x_i^+ = \left( \frac{\bar{x}_i^- \sigma_{m_i}^2 + m_i y_i (\sigma_i^-)^2}{\sigma_{m_i}^2 + m_i^2 (\sigma_i^-)^2} \right)$$

$$\sigma_i^+ = \sqrt{\left( \frac{\sigma_{m_i}^2 (\sigma_i^-)^2}{(\sigma_{m_i}^2 + m_i^2 (\sigma_i^-)^2)} \right)}$$

Dynamic Model:

$$\mathbf{x}_i \sim N(\mathcal{D}_i \mathbf{x}_{i-1}, \Sigma_{d_i})$$

$$\mathbf{y}_i \sim N(\mathcal{M}_i \mathbf{x}_i, \Sigma_{m_i})$$

Start Assumptions:  $\bar{\mathbf{x}}_0^-$  and  $\Sigma_0^-$  are known

Update Equations: Prediction

$$\bar{\mathbf{x}}_i^- = \mathcal{D}_i \bar{\mathbf{x}}_{i-1}^+$$


$$\Sigma_i^- = \Sigma_{d_i} + \mathcal{D}_i \Sigma_{i-1}^+ \mathcal{D}_i$$


Update Equations: Correction

$$\mathcal{K}_i = \Sigma_i^- \mathcal{M}_i^T [\mathcal{M}_i \Sigma_i^- \mathcal{M}_i^T + \Sigma_{m_i}]^{-1}$$

$$\bar{\mathbf{x}}_i^+ = \bar{\mathbf{x}}_i^- + \mathcal{K}_i [\mathbf{y}_i - \mathcal{M}_i \bar{\mathbf{x}}_i^-]$$


$$\Sigma_i^+ = [\mathbf{Id} - \mathcal{K}_i \mathcal{M}_i] \Sigma_i^-$$

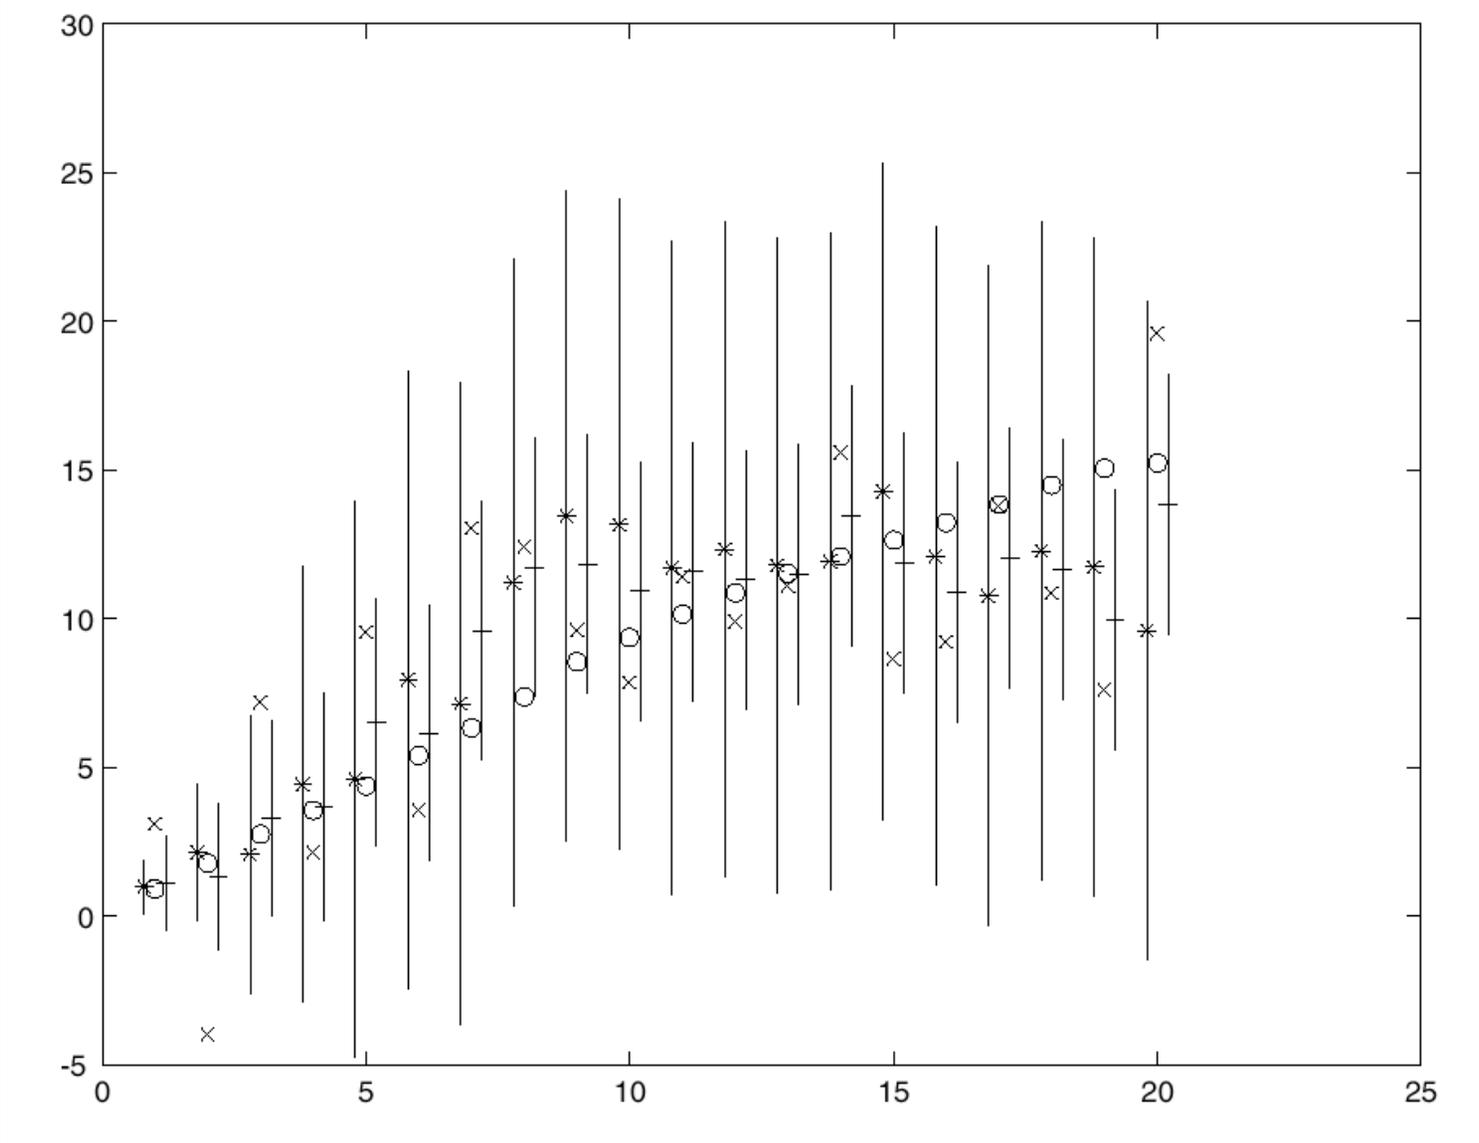


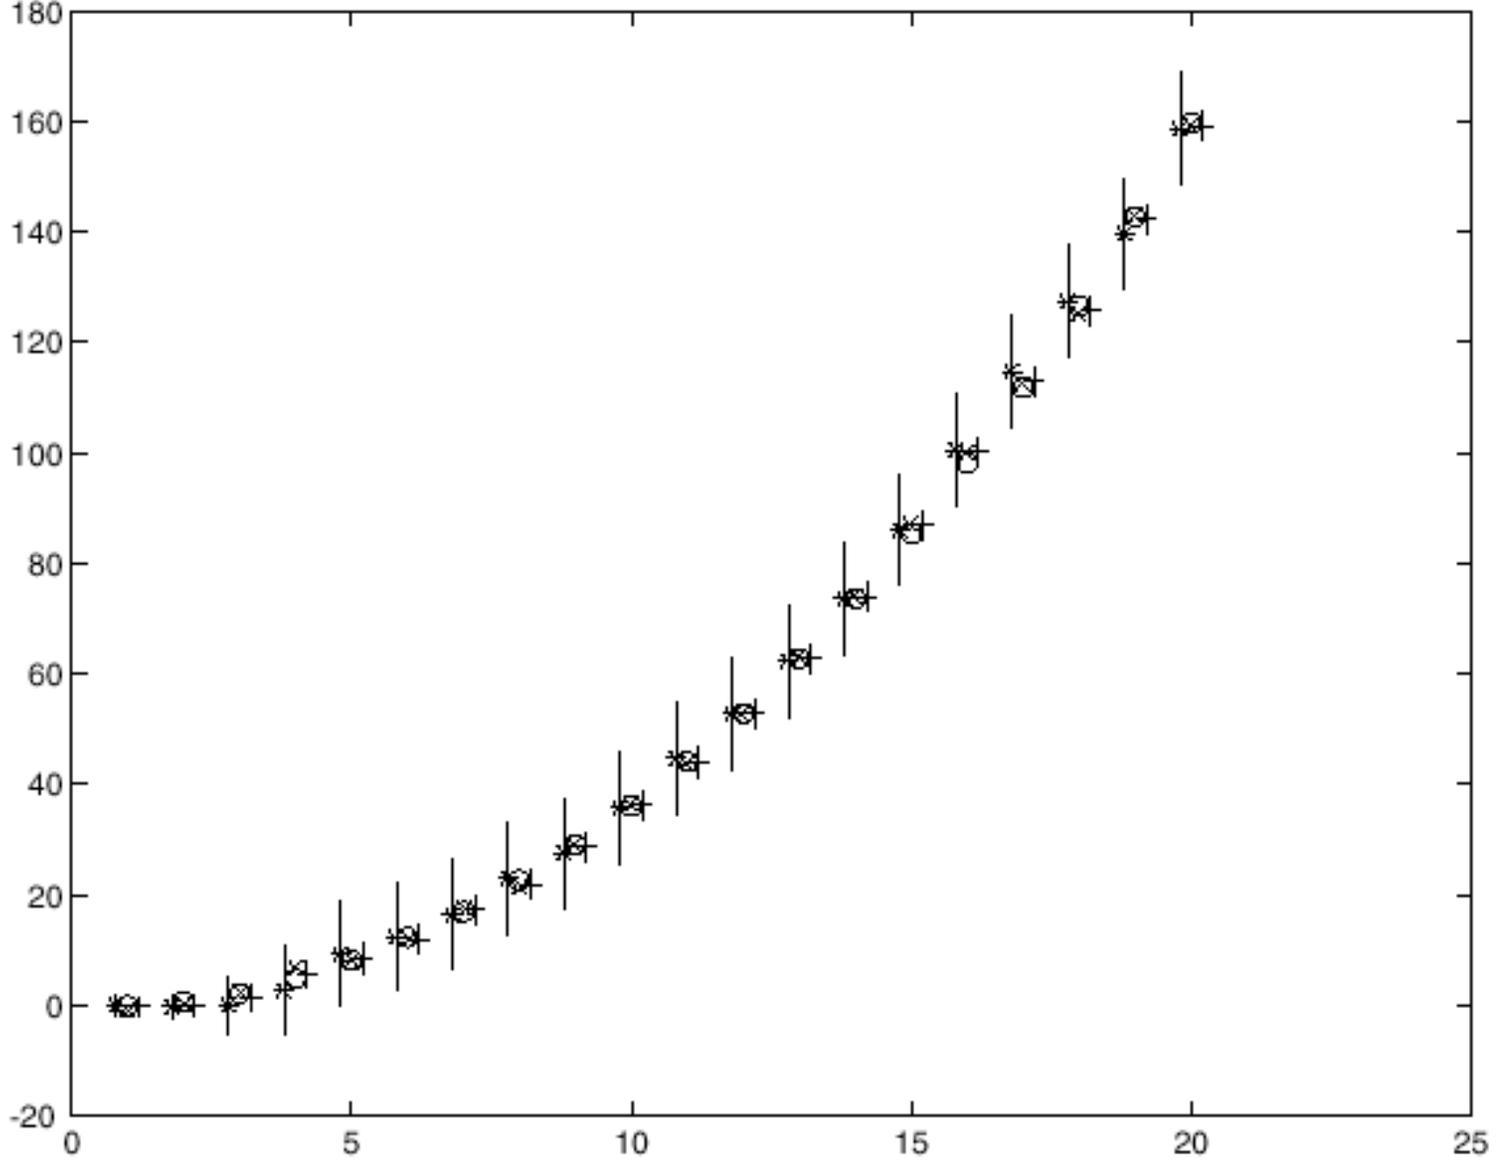


# Smoothing

- Idea
  - We don't have the best estimate of state - what about the future?
  - Run two filters, one moving forward, the other backward
  - Now combine state estimates

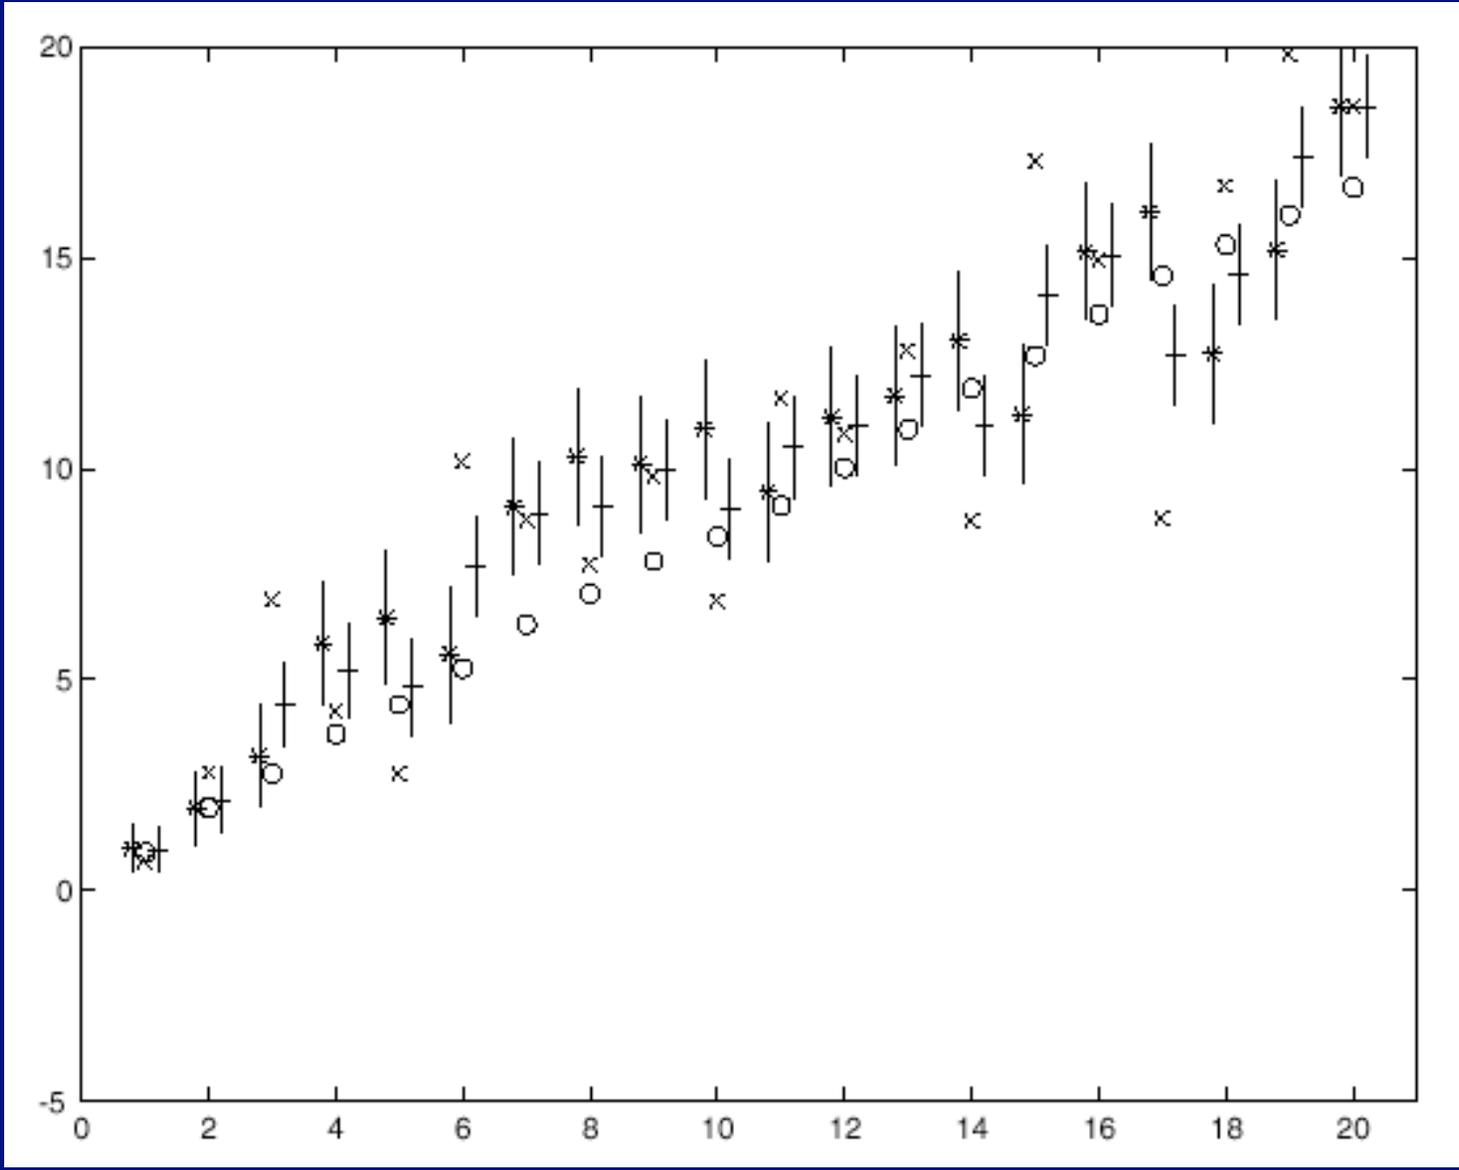


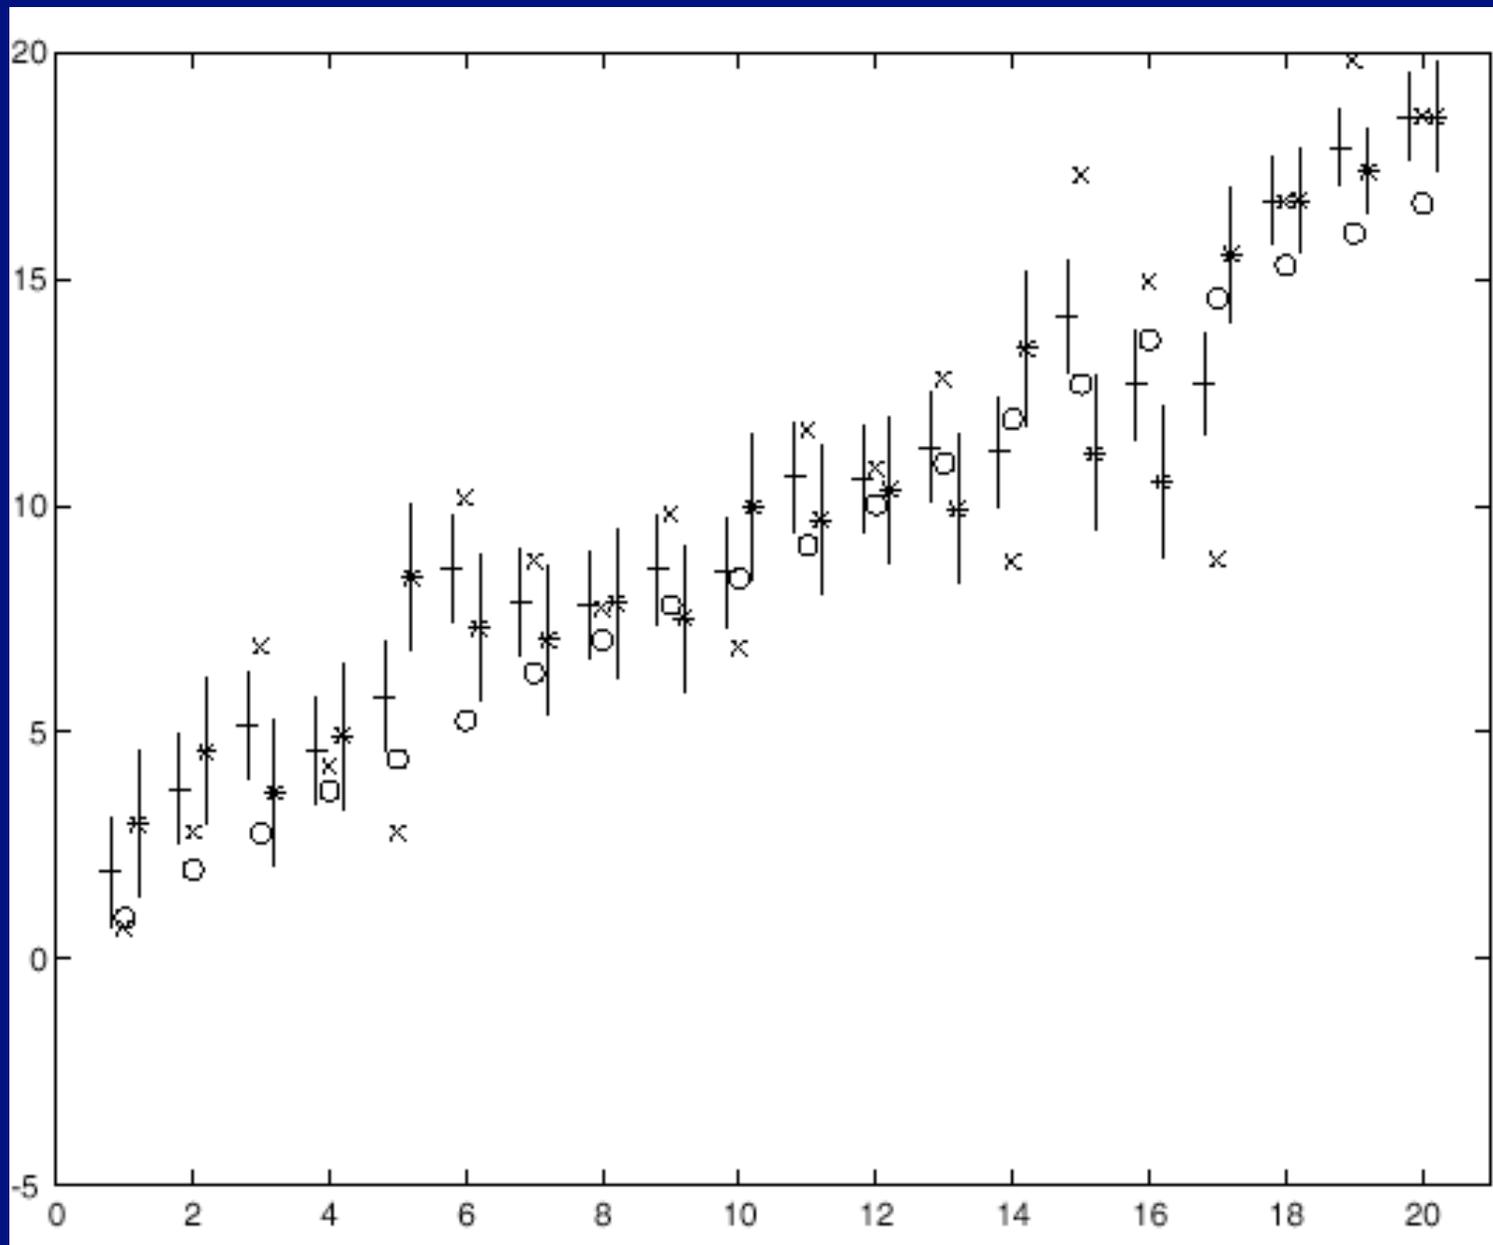


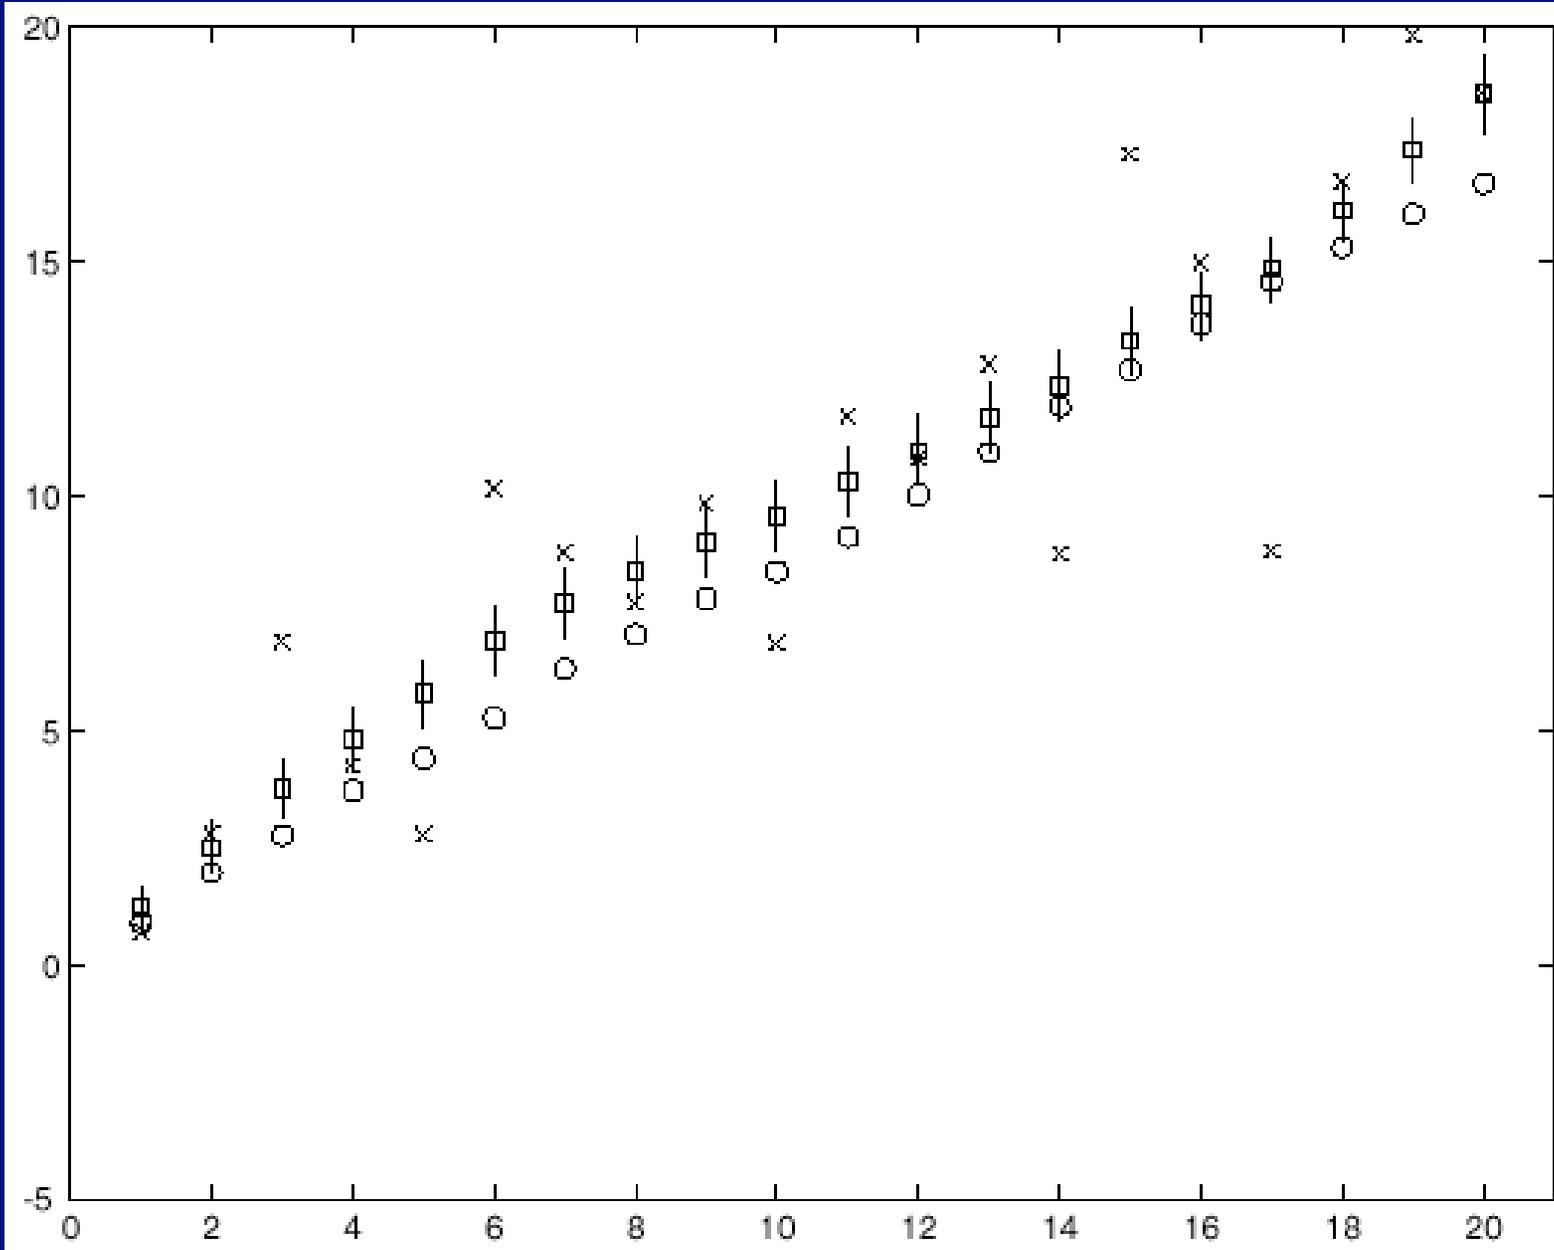



# Data Association

- Nearest neighbours
  - choose the measurement with highest probability given predicted state
  - popular, but can lead to catastrophe
- Probabilistic Data Association
  - combine measurements, weighting by probability given predicted state
  - gate using predicted state

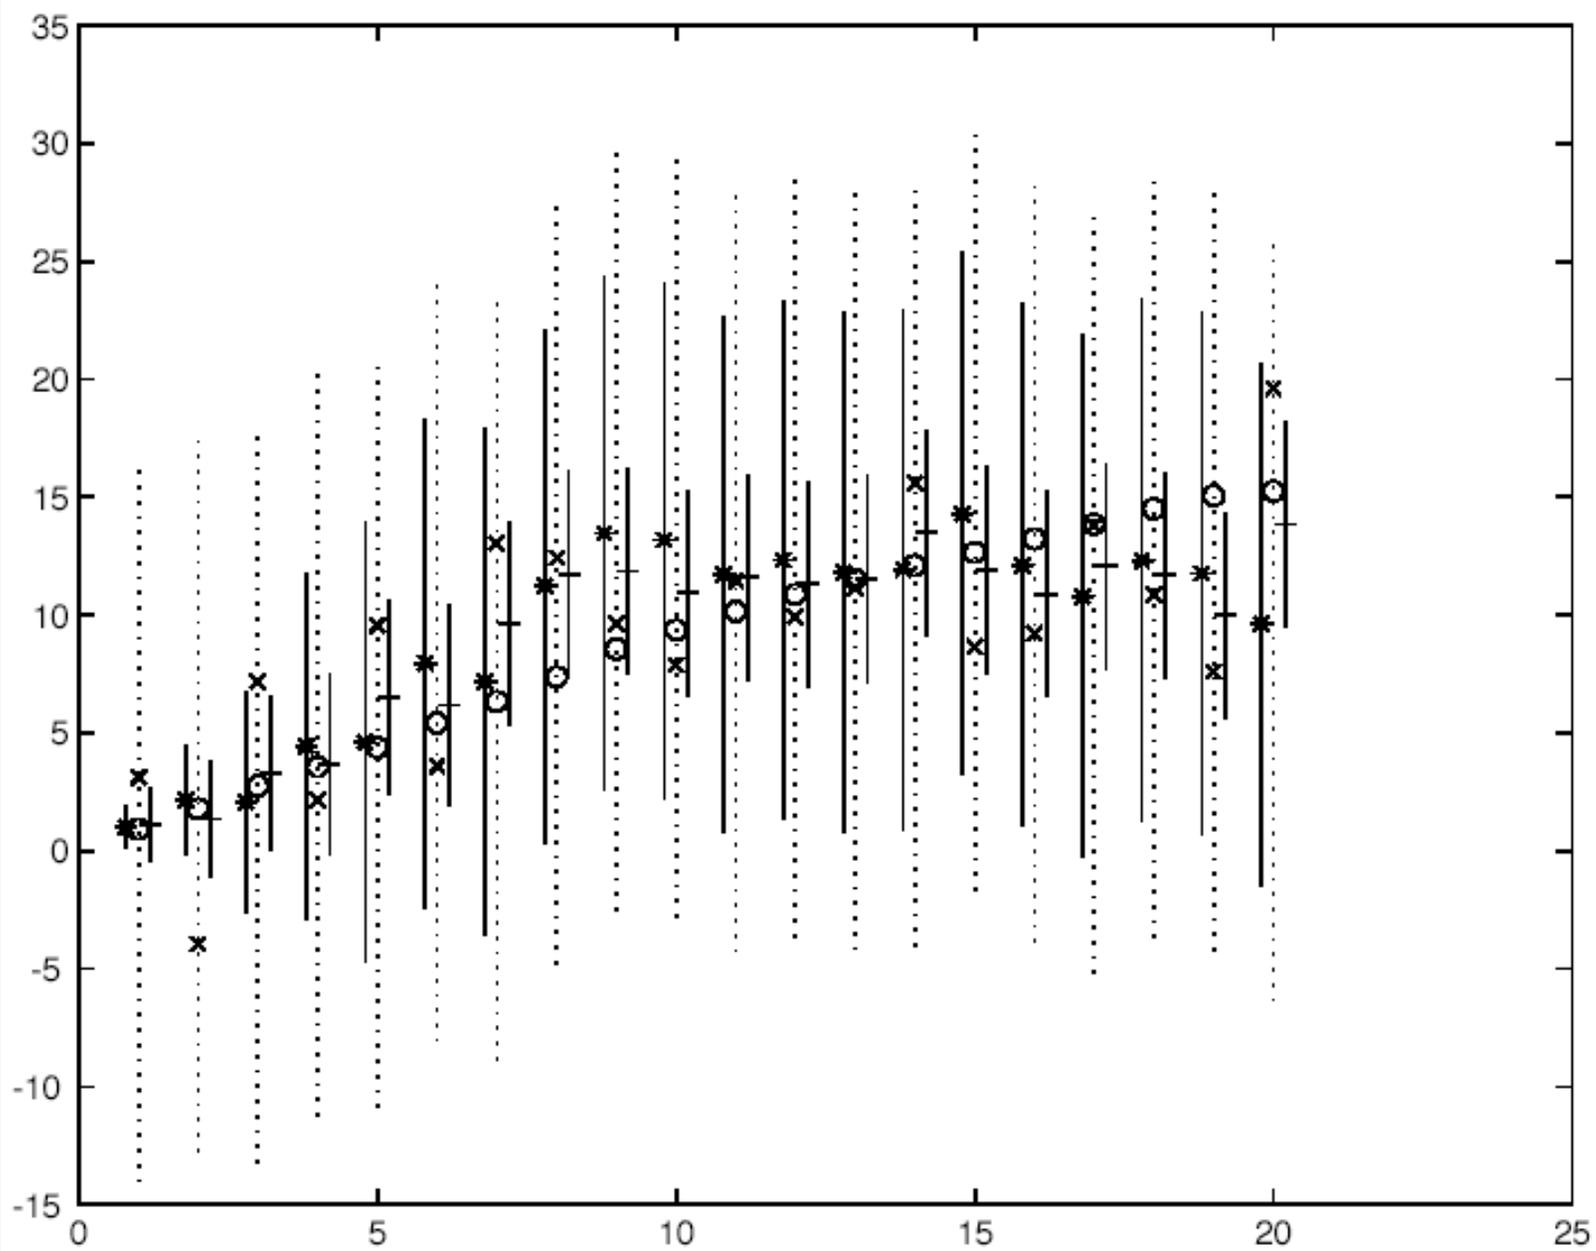

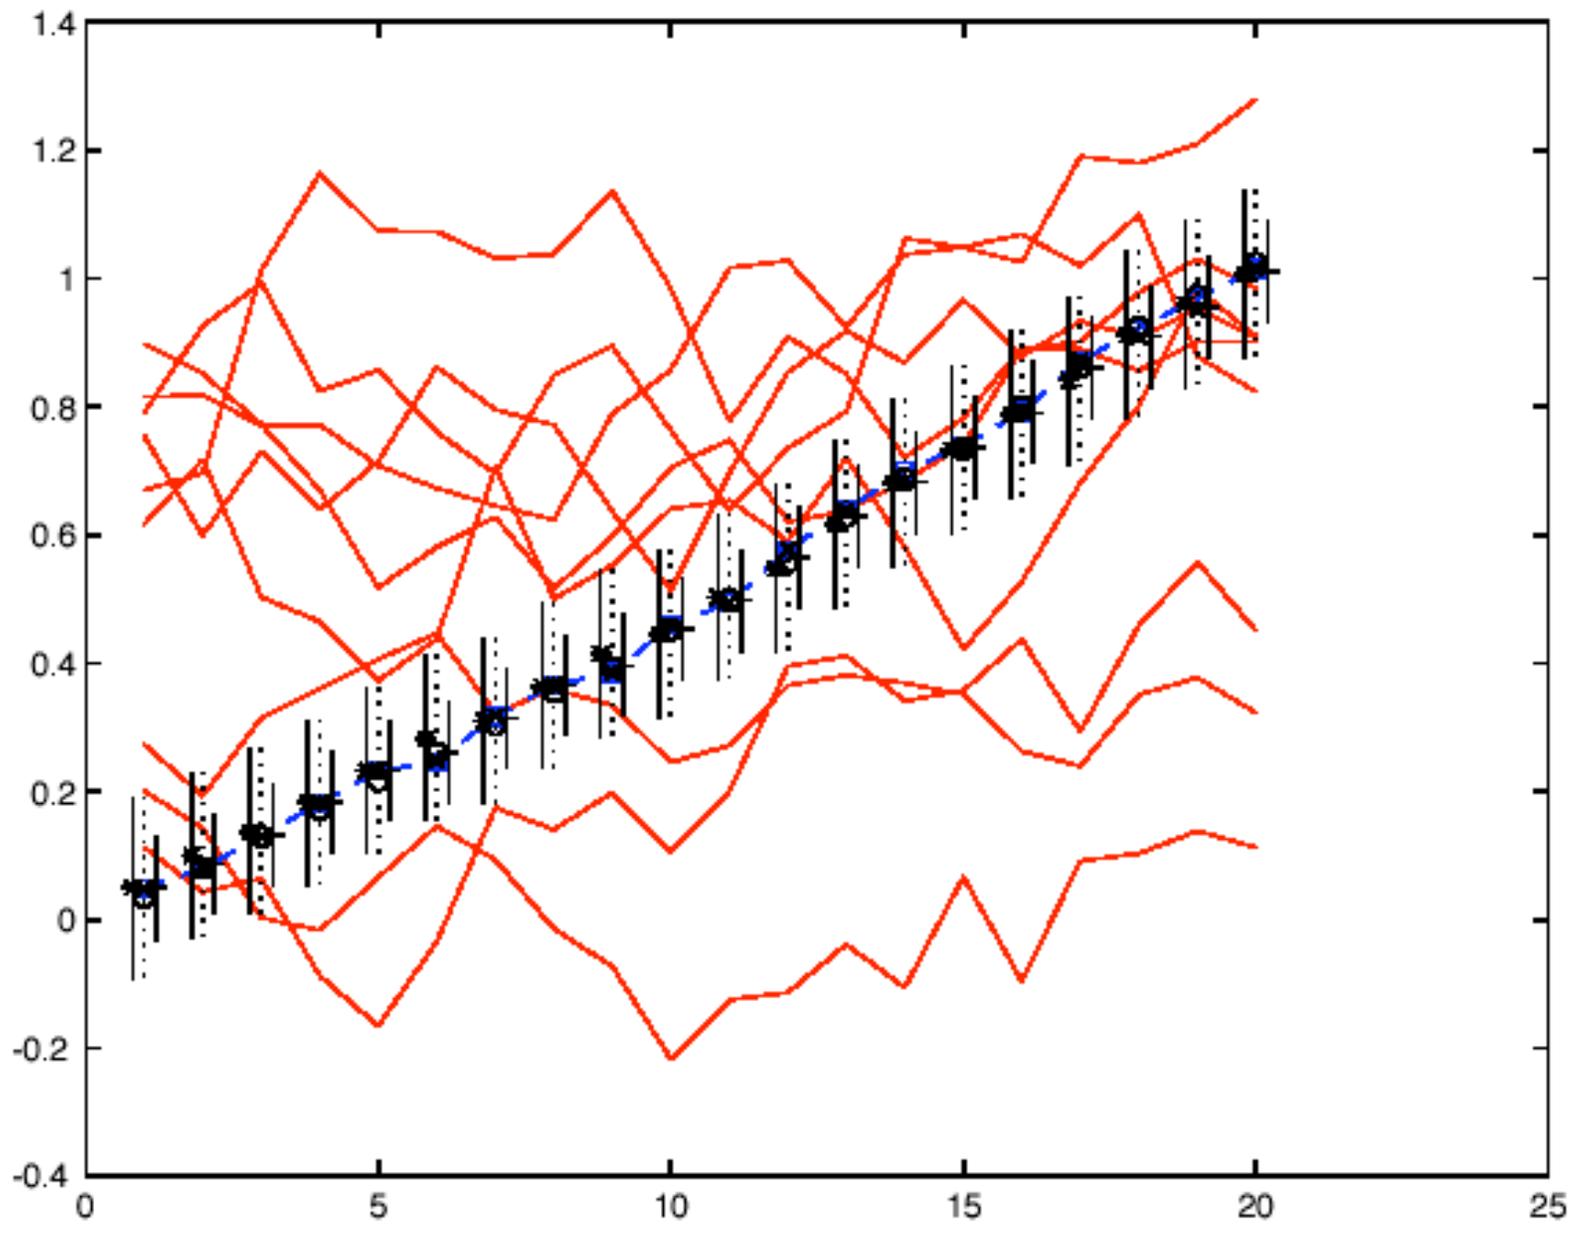

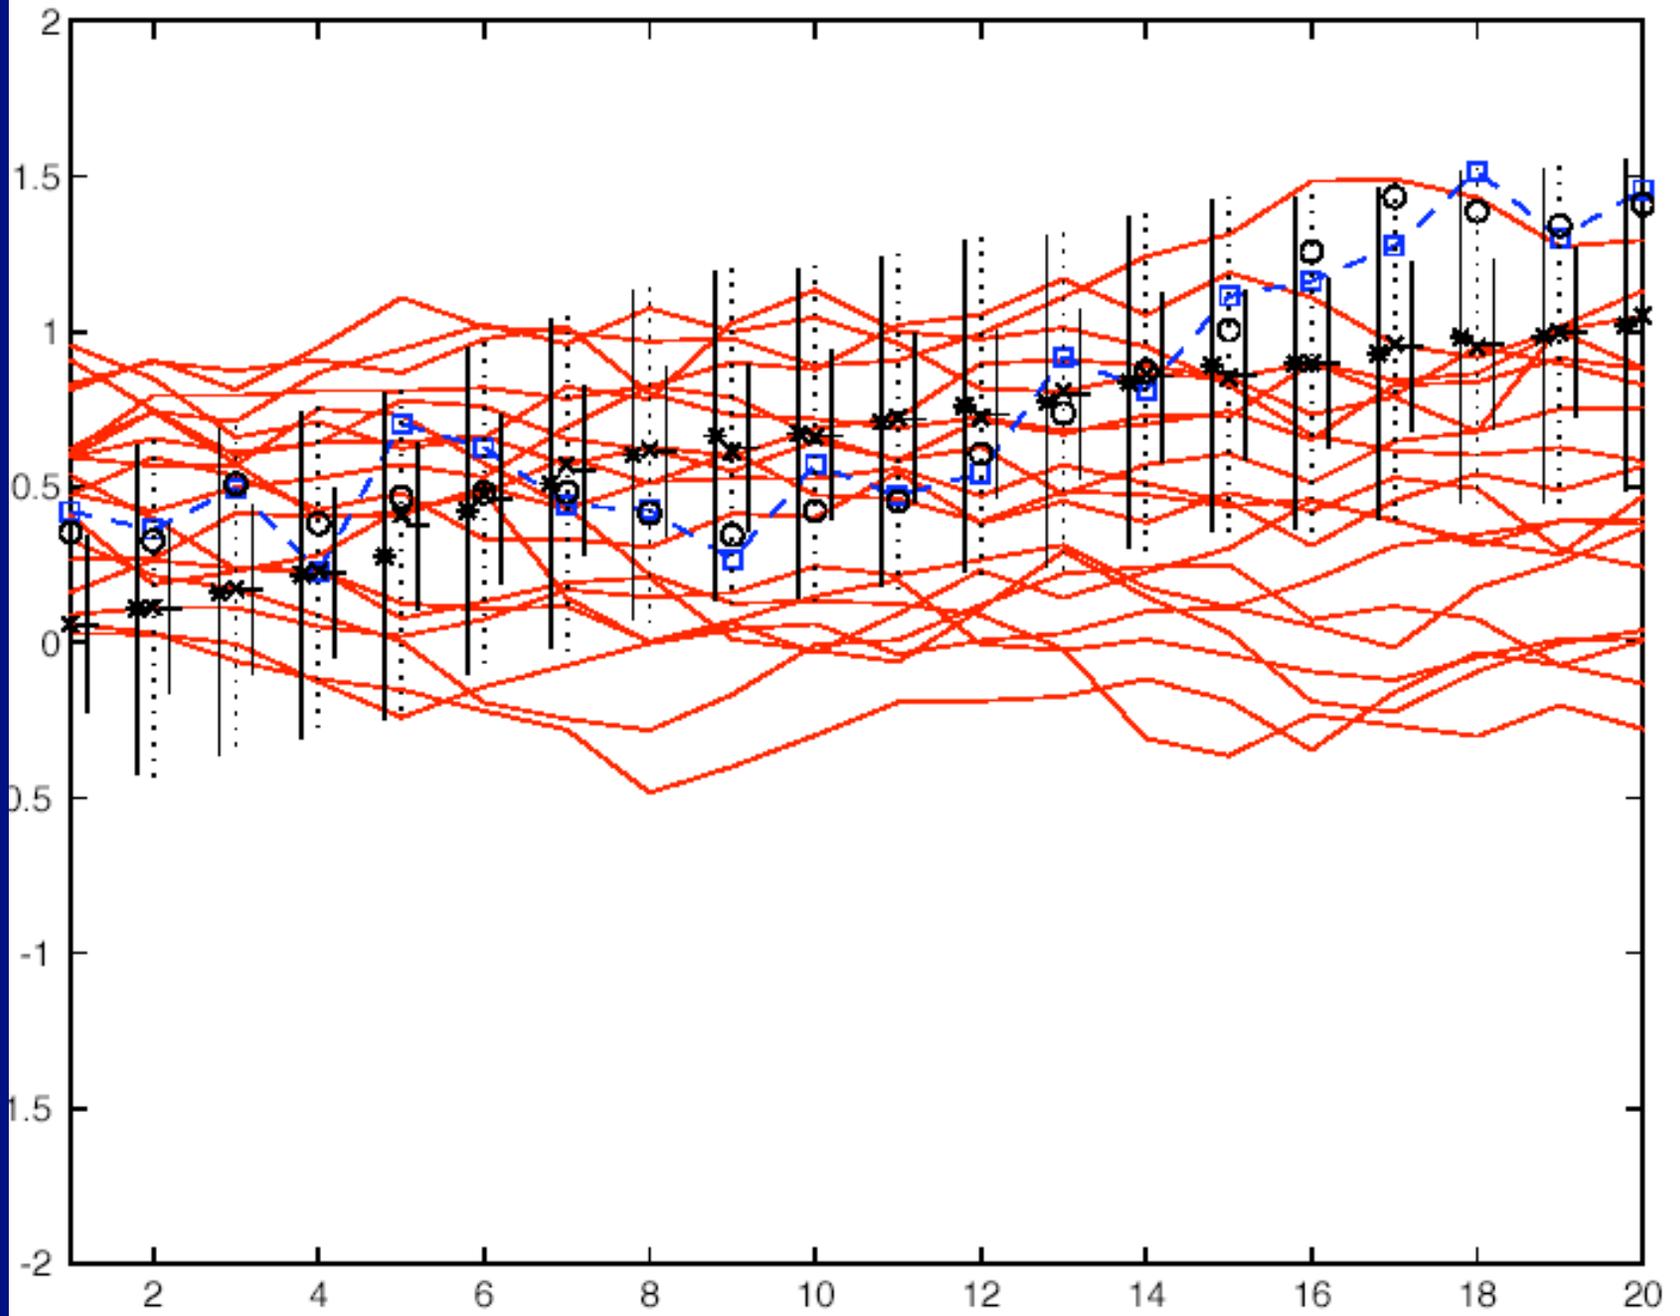

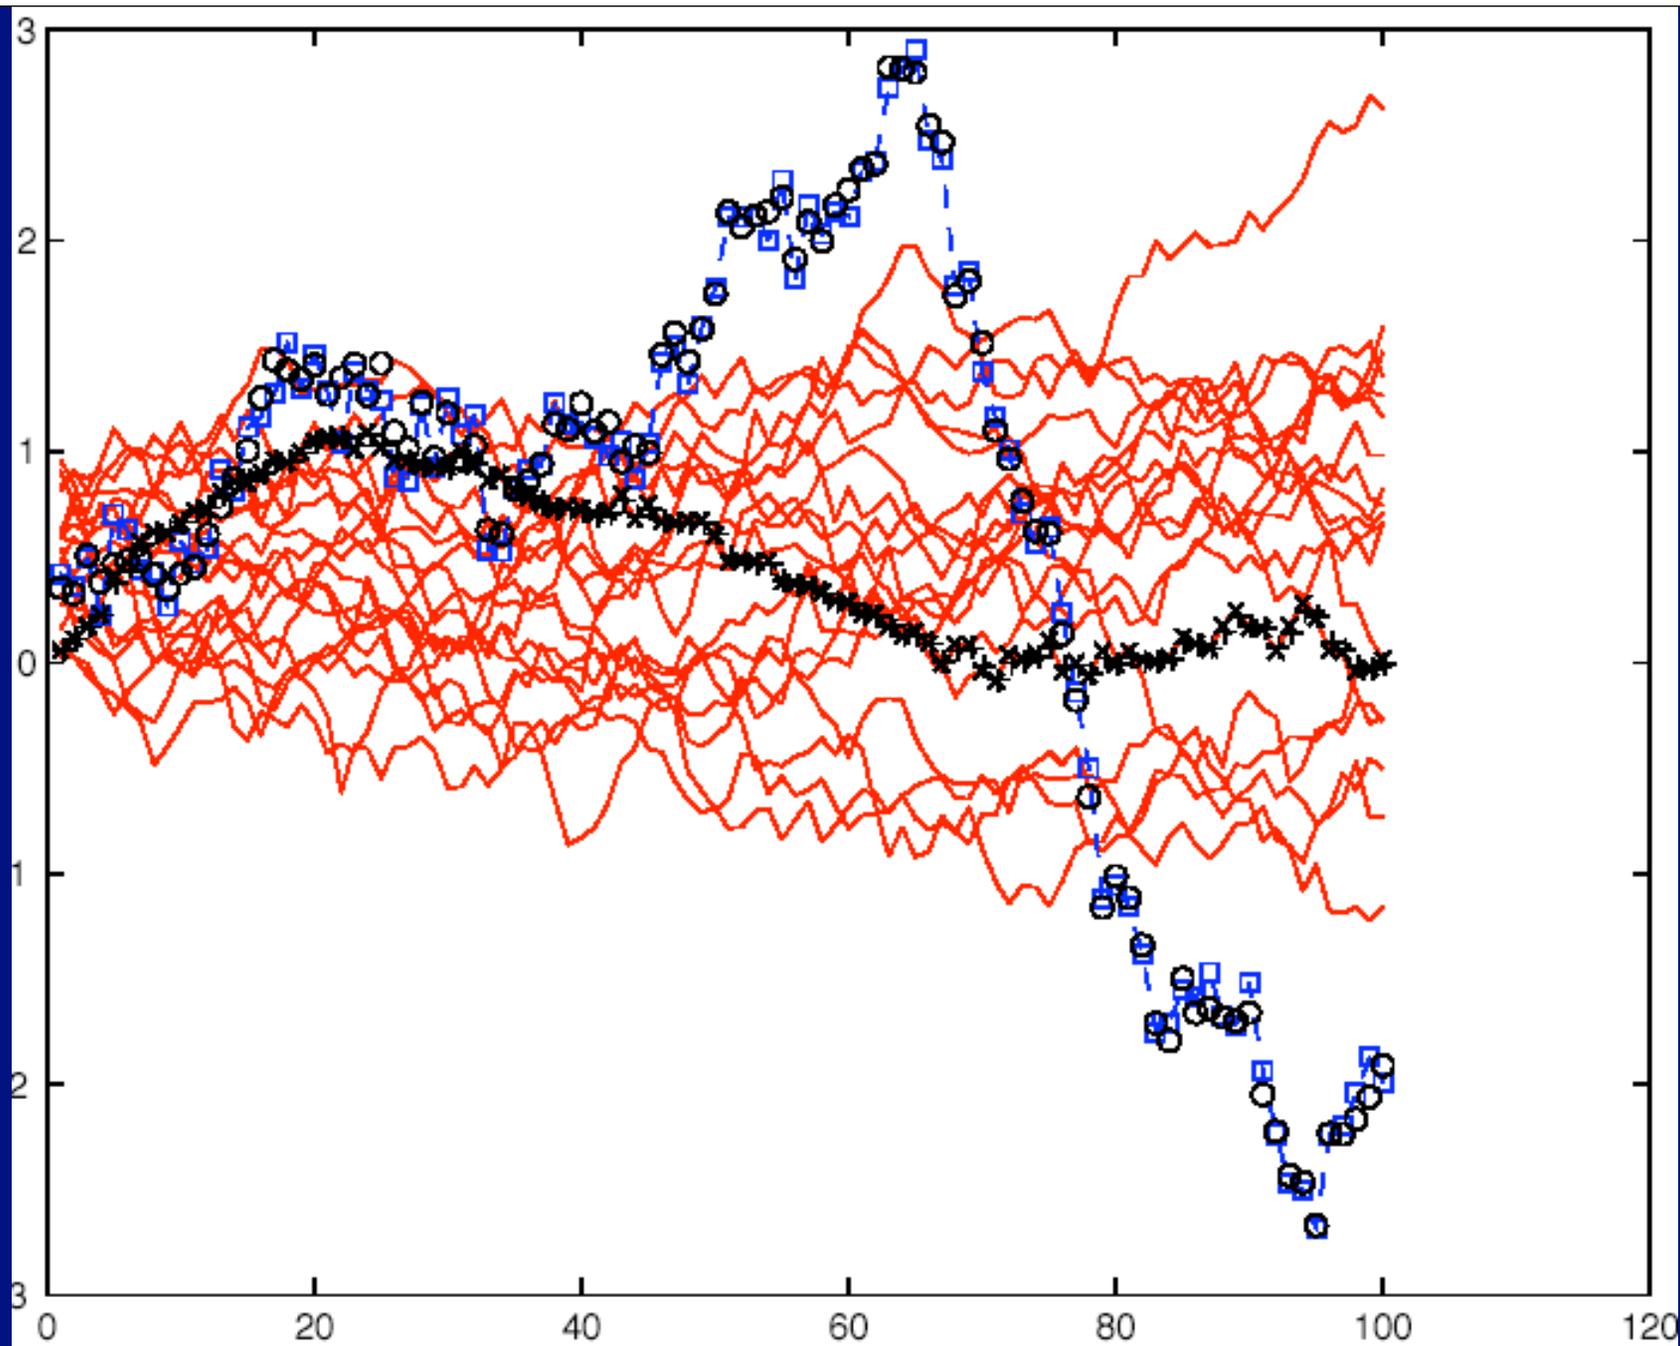

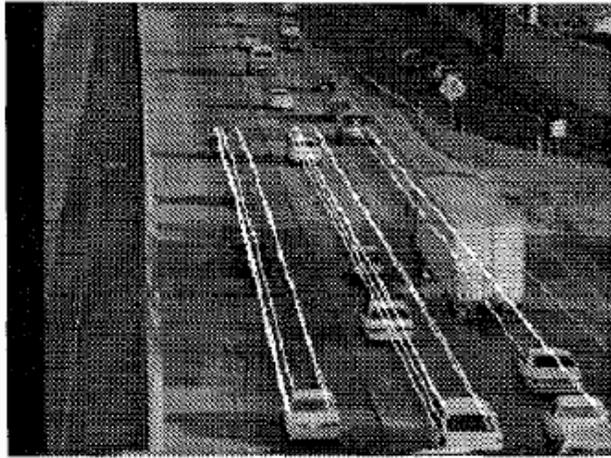


Figure 4: Example tracks of corner features.


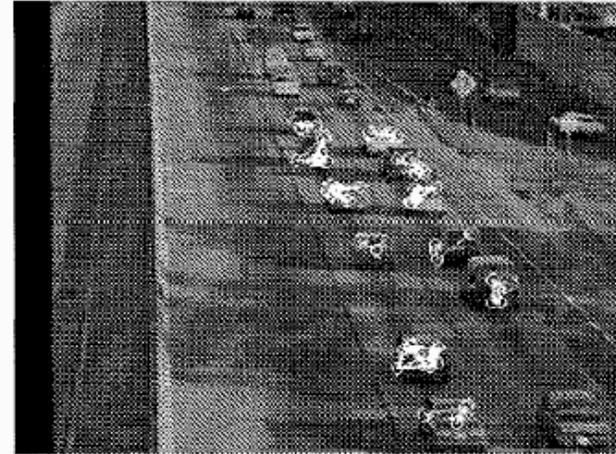


Figure 5: Example groups of corner features.

resent vehicles. *figure from A Real-Time Computer Vision System for Measuring Traffic Parameters, Beymer, McClachlan, Coifman and Malik et al. p.498, in the fervent hope of receiving permission*

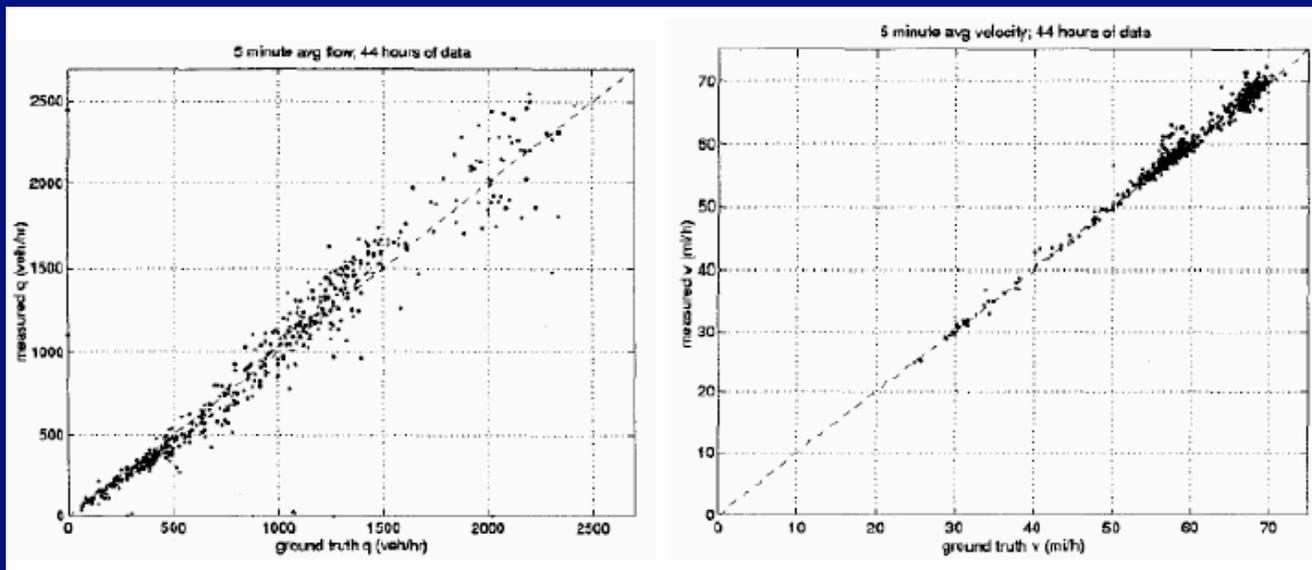






*from A Real-Time Computer Vision System for Measuring Traffic Parameters, Beymer, McClachlan, Coifman and Malik et al. p.500, in the fervent hope of receiving permission*

# Beyond the Kalman Filter

- Various phenomena lead to multiple modes
  - nonlinear dynamics
  - kinematic ambiguities
  - data association problems
- Kalman filters represent these poorly
  - alternatives
    - Mixture models
    - particle filters

$x_{i+1}$

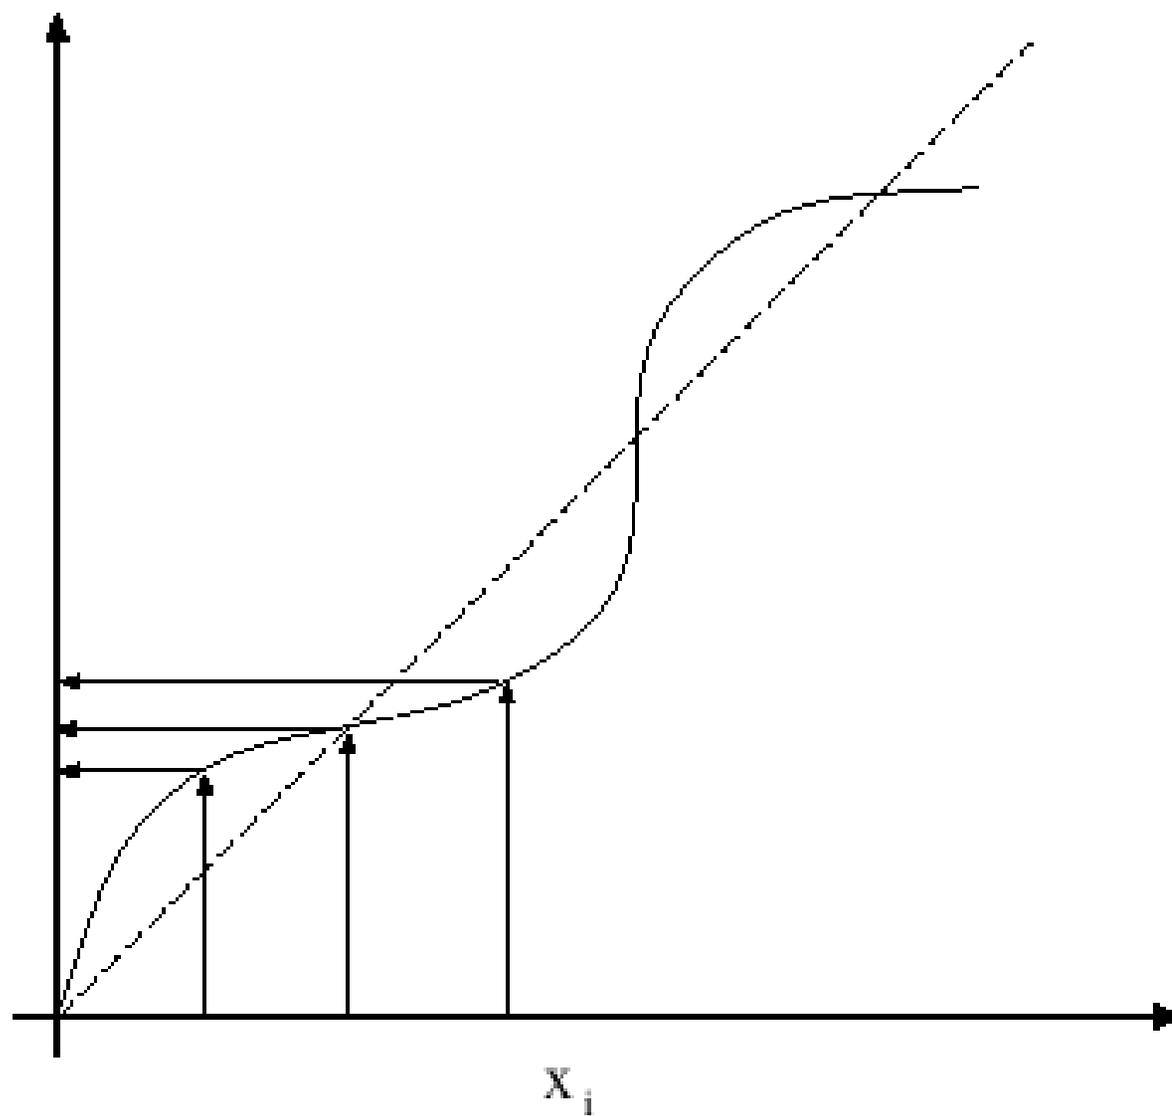

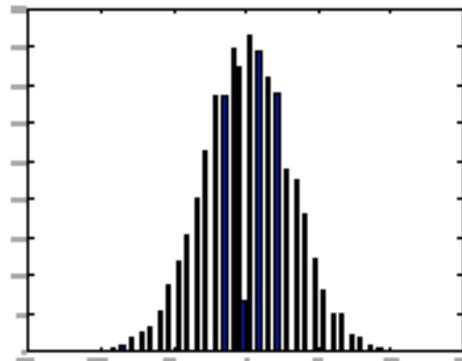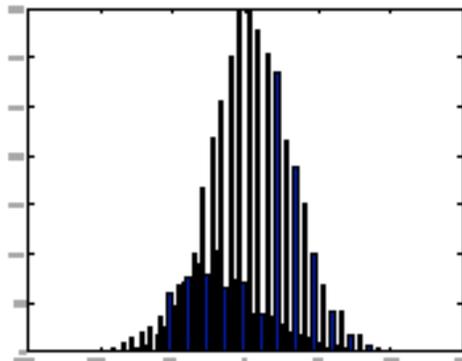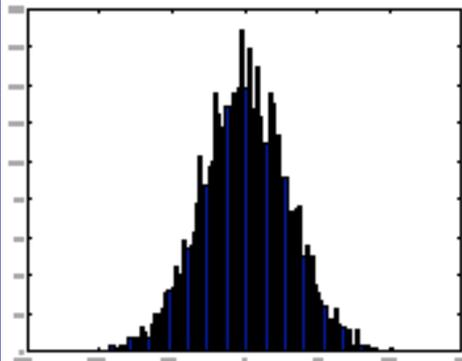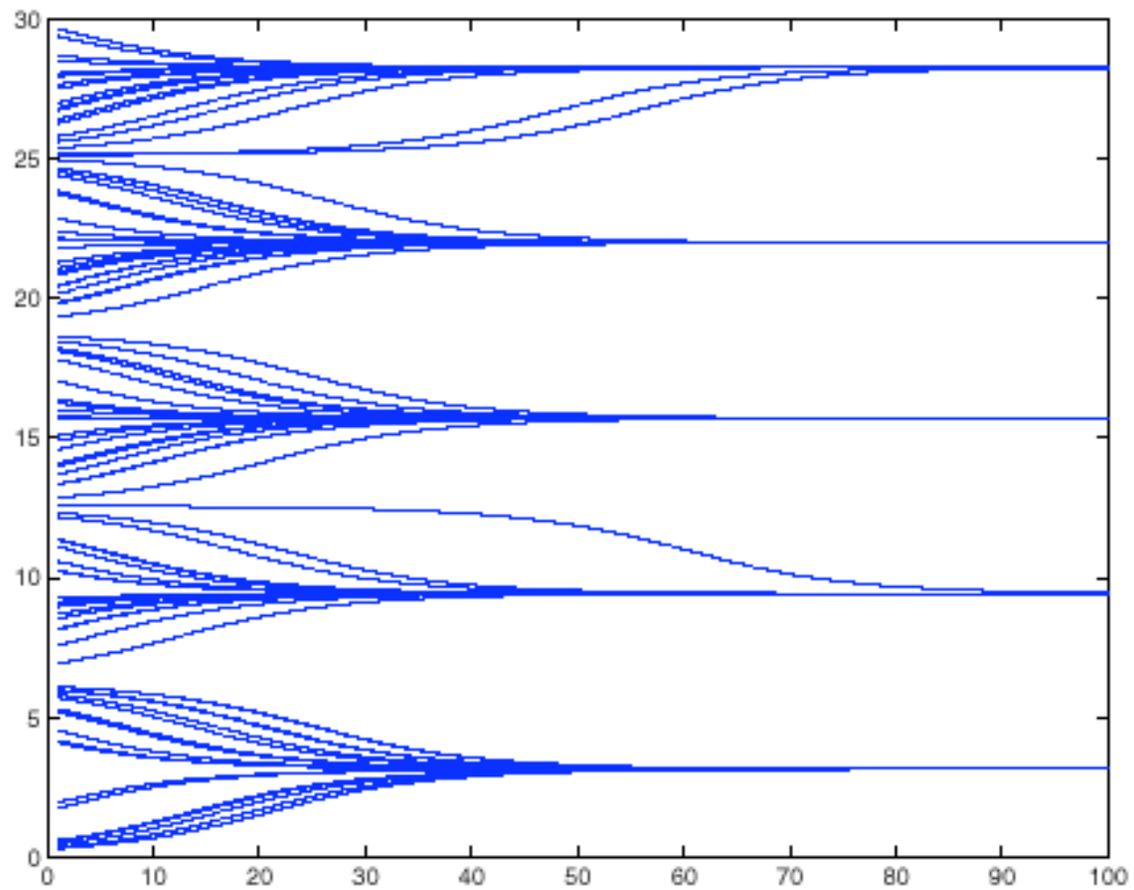

# Multiple Modes from Data Association

- Linear dynamics, Linear measurement, two measurements
  - Both Gaussian, one depends on state and other doesn't
  - Not known which depends on state
- One hidden variable per frame
- Leads to  $2^{\text{(number of frames)}}$  mixture of Gaussians