

Basic Segmentation

D.A. Forsyth, CS 543




Segmentation and Grouping


- Motivation: not all information is evidence
- Obtain a compact representation
 - from an image/motion sequence/set of tokens
- Should support application
 - Broad theory is absent at present
- Grouping (or clustering)
 - collect together tokens that “belong together”
- Fitting
 - associate a model with tokens
 - issues
 - which model?
 - which token goes to which element?
 - how many elements in the model?

General ideas

- tokens
 - whatever we need to group (pixels, points, surface elements, etc., etc.)
- top down segmentation
 - tokens belong together because they lie on the same object
- bottom up segmentation
 - tokens belong together because they are locally coherent
- These two are not mutually exclusive
 - e.g. symmetries, etc.




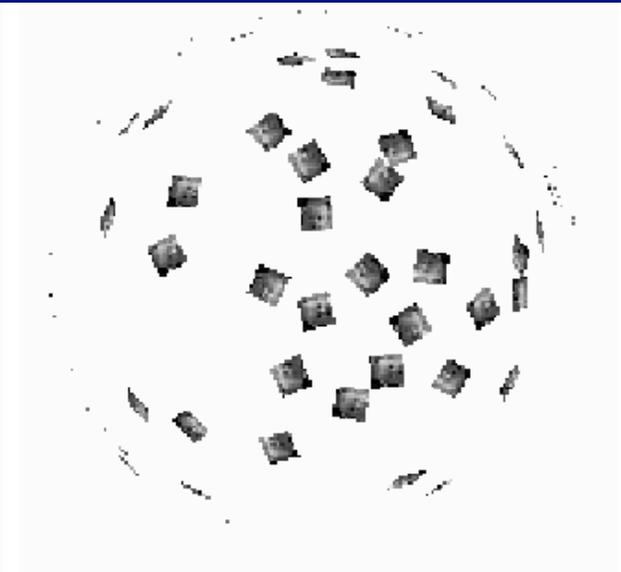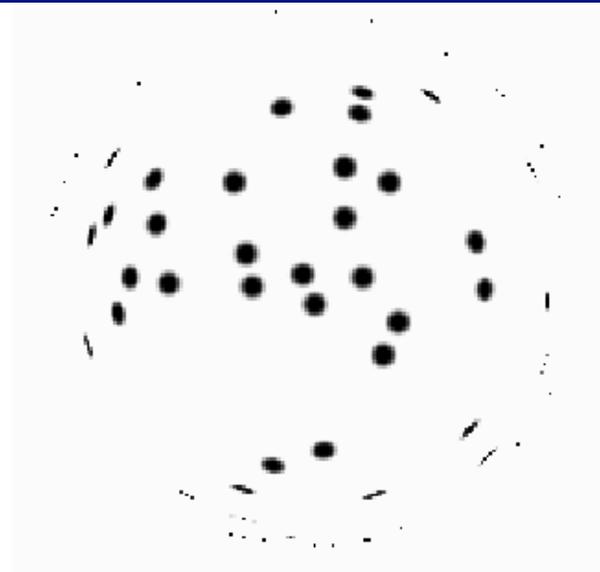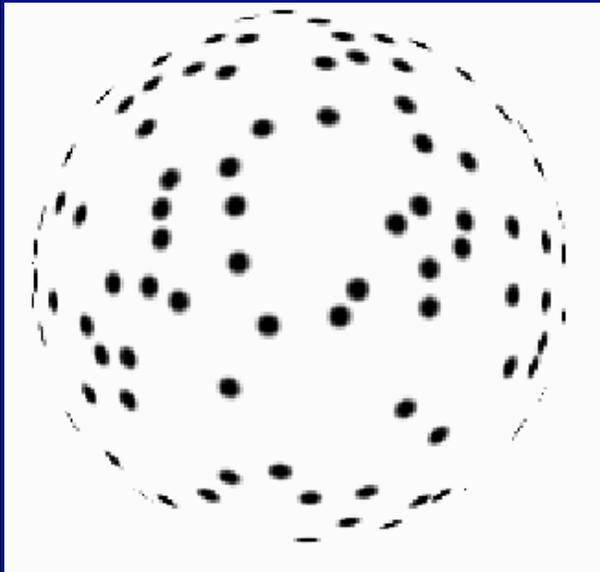


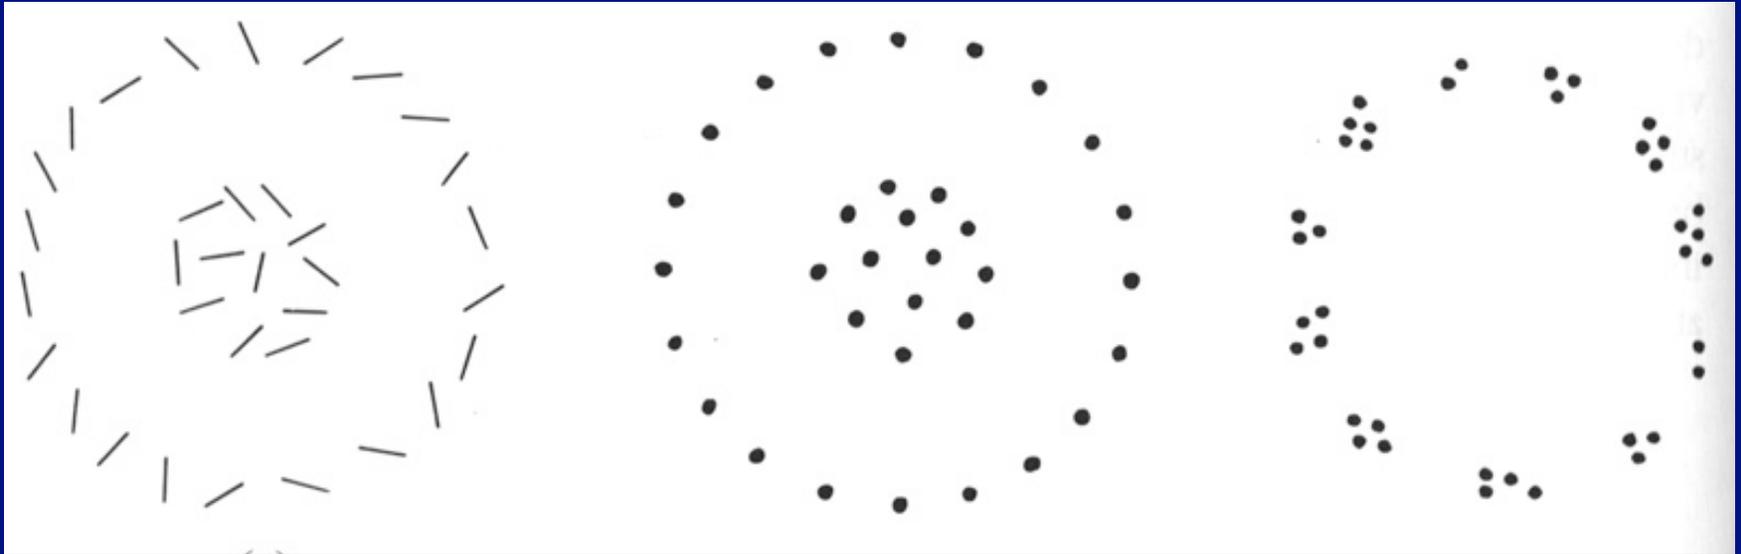



Basic ideas of grouping in humans

- Figure-ground discrimination
 - grouping can be seen in terms of allocating some elements to a figure, some to ground
 - impoverished theory
- Gestalt properties
 - elements in a collection of elements can have properties that result from relationships (Muller Lyer effect)
 - gestaltqualitat
 - A series of factors affect whether elements should be grouped together
 - Gestalt factors

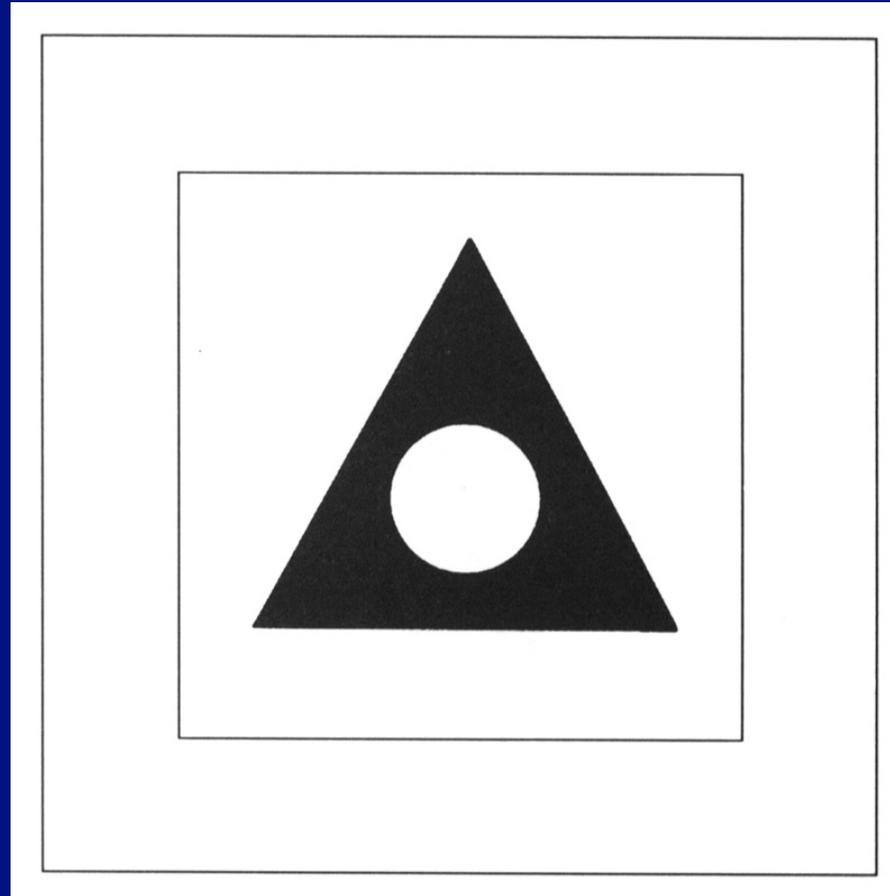

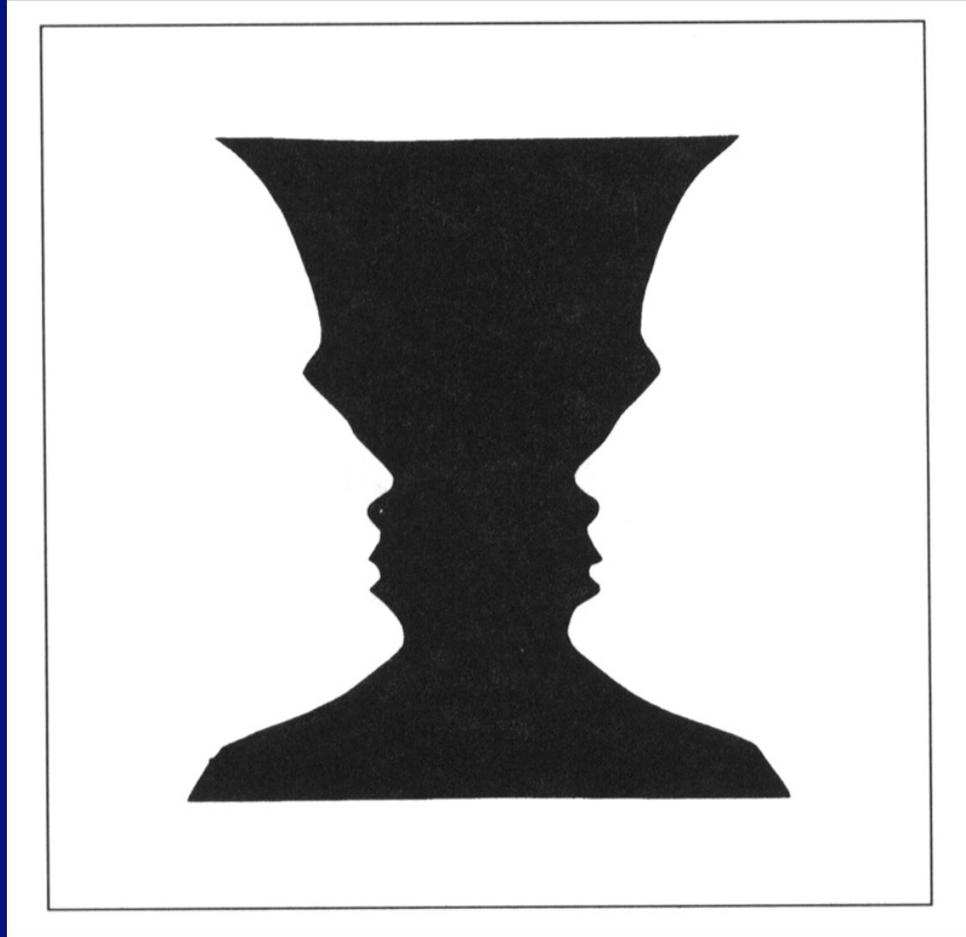


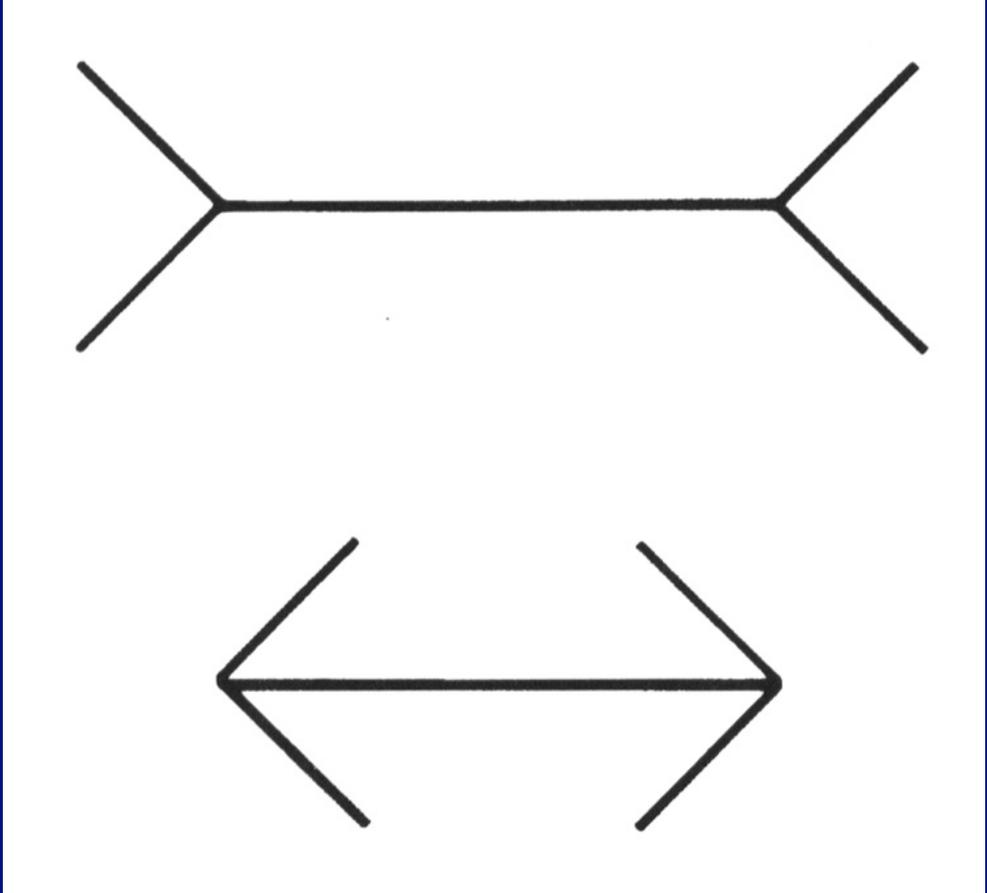

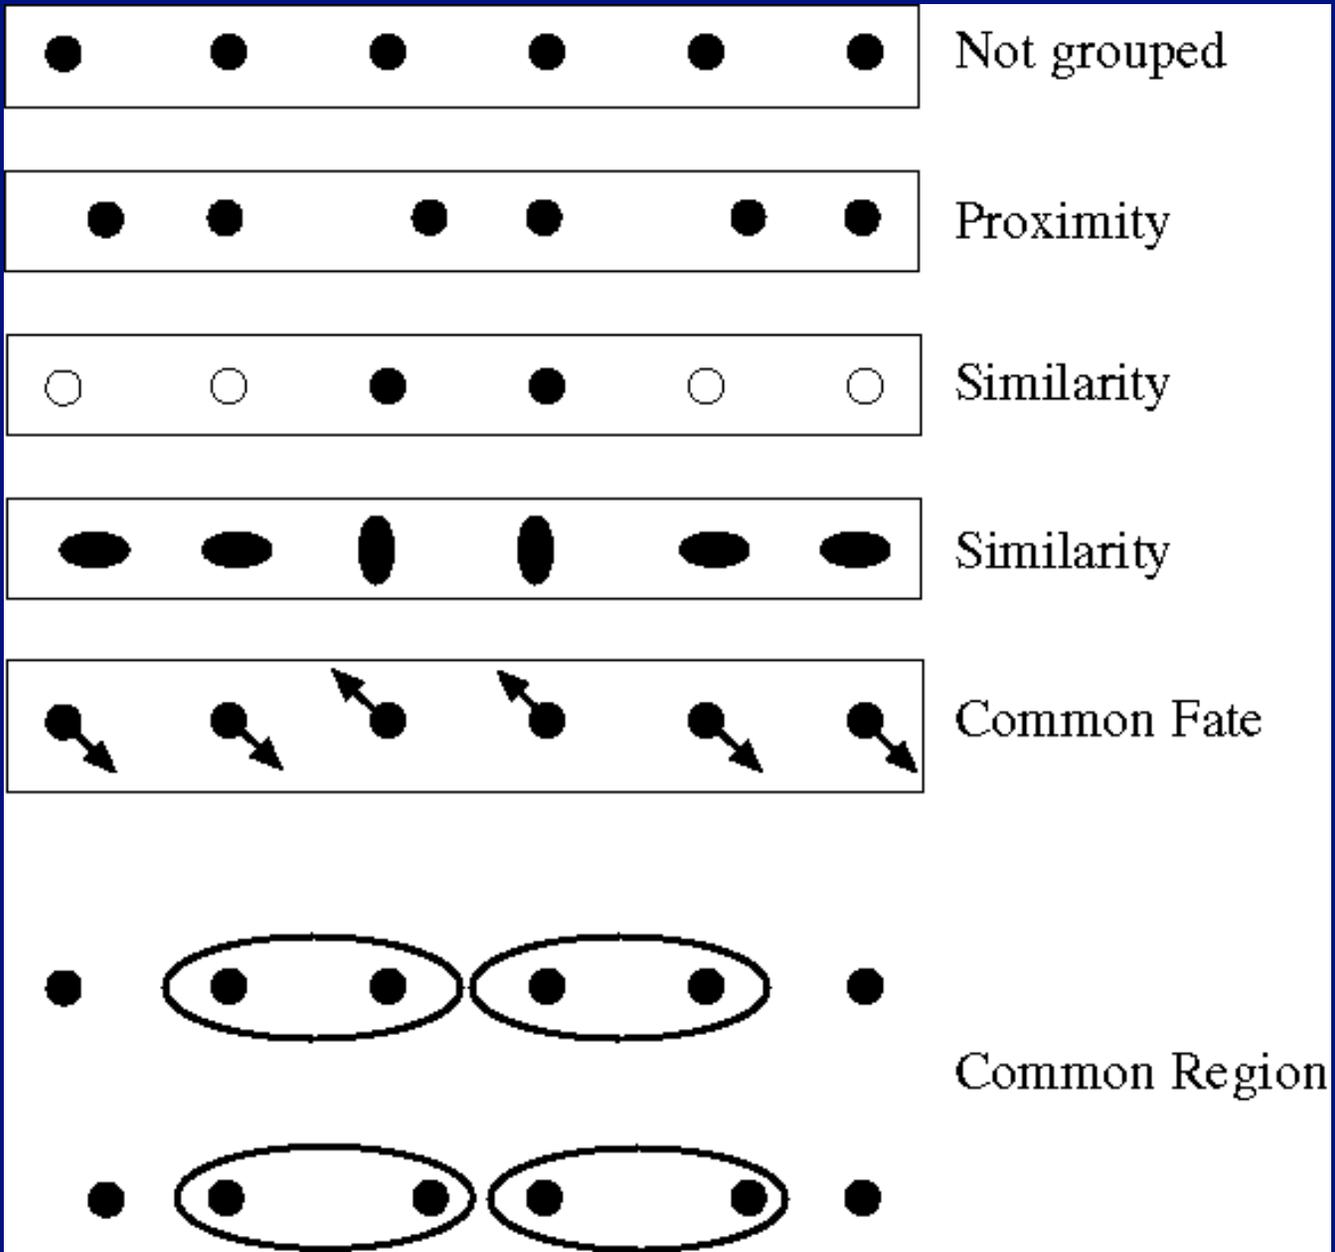





Parallelism

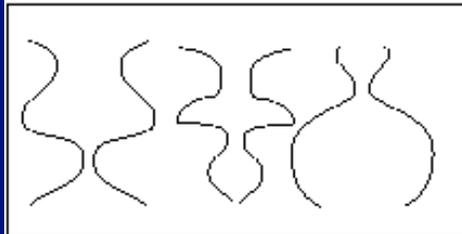

Symmetry

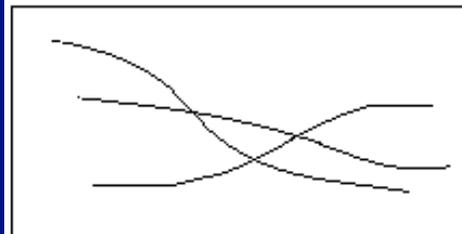

Continuity

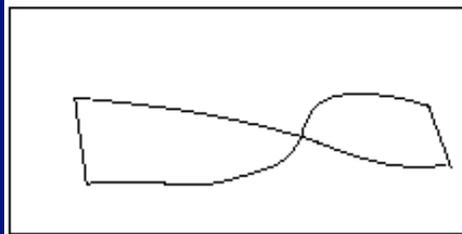

Closure

Technique: Background Subtraction

- If we know what the background looks like, it is easy to identify “interesting bits”
- Applications
 - Person in an office
 - Tracking cars on a road
 - surveillance
- Approach:
 - use a moving average to estimate background image
 - subtract from current frame
 - large absolute values are interesting pixels
 - trick: use morphological operations to clean up pixels








Technique: Shot Boundary Detection


- Find the shots in a sequence of video
 - shot boundaries usually cause big differences between succeeding frames
- Strategy:
 - compute interframe distances
 - declare a boundary where these are big
- Possible distances
 - frame differences; histogram differences; block comparisons; edge differences
- Applications:
 - representation for movies, or video sequences
 - find shot boundaries
 - obtain “most representative” frame
 - supports search

Segmentation as clustering

- Cluster together (pixels, tokens, etc.) that belong together
- Agglomerative clustering
 - attach closest to cluster it is closest to
 - repeat
- Divisive clustering
 - split cluster along best boundary
 - repeat
- Point-Cluster distance
 - single-link clustering
 - complete-link clustering
 - group-average clustering
- Dendrograms
 - yield a picture of output as clustering process continues

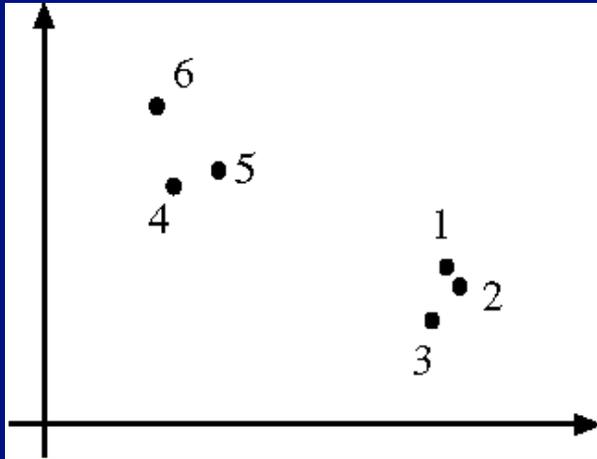

Dendrograms can inform choice of clusters

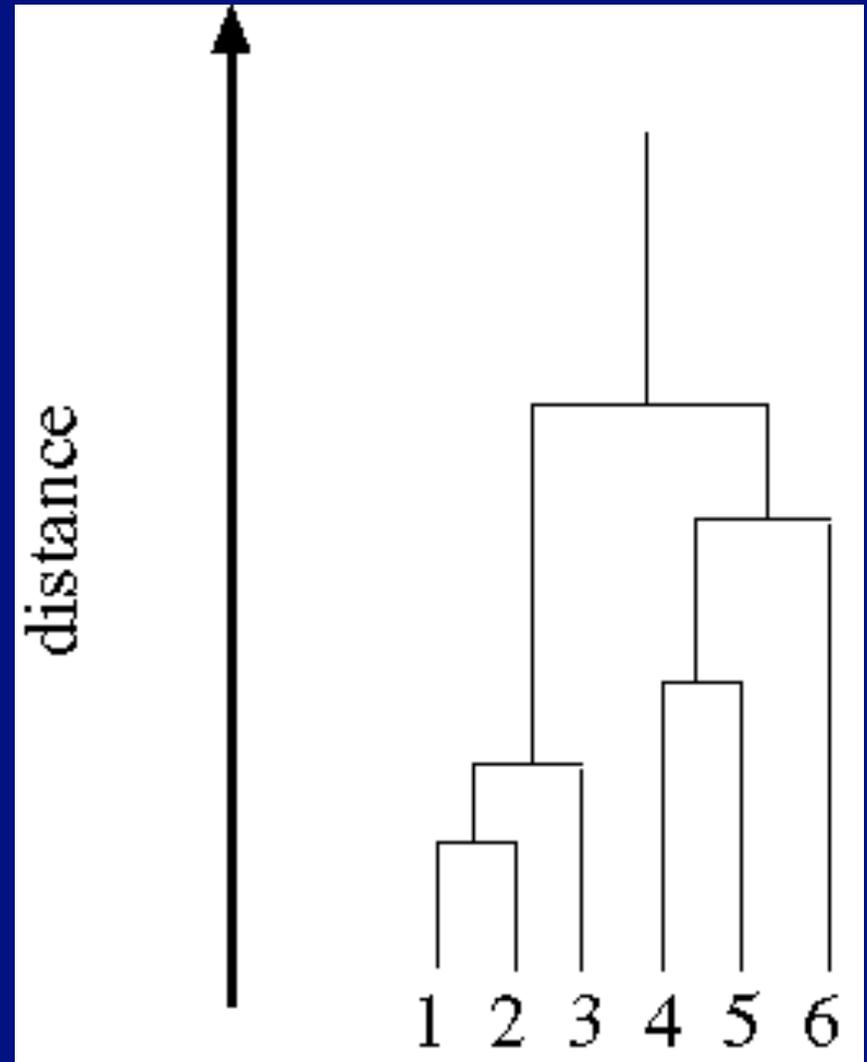



From Ohlander et al, 1978

